arXiv:0808.2548v2 [cs.IT] 28 Jul 2009

Negative β-encoder

Tohru Kohda, *Member, IEEE,* Satoshi Hironaka, and Kazuyuki Aihara

***Abstract*—A new class of analog-to-digital (A/D) and digital-to-analog (D/A) converters using a flaky quantiser, called the β-encoder, has been shown to have exponential bit rate accuracy while possessing a self-correction property for fluctuations of the amplifier factor β and the quantiser threshold ν. The probabilistic behavior of such a flaky quantiser is explained as the deterministic dynamics of the multi-valued Rényi map. That is, a sample x is always confined to a contracted subinterval while successive approximations of x are performed using β-expansion even if ν may vary at each iteration. This viewpoint enables us to get the decoded sample, which is equal to the midpoint of the subinterval, and its associated characteristic equation for recovering β which improves the quantisation error by more than 3dB when $\beta > 1.5$. The invariant subinterval under the Rényi map shows that ν should be set to around the midpoint of its associated greedy and lazy values. Furthermore, a new A/D converter is introduced called the negative β-encoder, which further improves the quantisation error of the β-encoder. A two-state Markov chain describing the β-encoder suggests that a negative eigenvalue of its associated transition probability matrix reduces the quantisation error.**

***Index Terms*—Analog-to-digital (A/D) conversion, flaky quantiser, β-expansion, β-encoder, chaotic dynamics, PCM, $\Sigma\Delta$ modulation, Markov chain.**

I. INTRODUCTION

SAMPLING and quantisation are necessary in almost all signal processing. The combined operations are called *analog-to-digital* (A/D) *conversion*. Since A/D converters are analog circuits, they have the fundamental problem that instability of the circuit elements degrades the A/D conversion. There are a number of possible remedies to cope with this problem.

The standard sampling theorem states that if a band-limited signal $f(t)$ is sampled at rates far above the Nyquist rate, called *oversampling*, then it can be reconstructed from its samples, denoted by $\{f(\frac{n}{M})\}_{n\in\mathcal{Z}}$ (with $M > 1$), by the use of the following formula with an appropriate function $\varphi(t)$, [1], [2], [3]

$$f(t) = \frac{1}{M}\sum_{n\in\mathcal{Z}} f(\frac{n}{M})\varphi(t-\frac{n}{M}). \tag{1}$$

The above formula does not result in a loss of information. However, since the amplitudes of the samples are continuous variables, each sample is quantised according to amplitude into a finite number of levels. This quantisation process necessarily introduces some distortion into the output. The magnitude of this type of distortion depends on the method by which the quantisation is performed.

Various kinds of A/D and digital-to-analog (D/A) conversions have been proposed. Related topics include one-bit coding through over-sampled data [4] and high-quality AD conversions using a coarse quantiser together with feedback [5], the concept of "*democracy*" [6], in which the individual bits in a coarsely quantised representation of a signal are all given "equal weight" in the approximation to the original signal, a pipelined AD converter [7], and a single-bit oversampled AD conversion using irregularly spaced samples [3].

Given a bandlimited function f, the L-bit pulse code modulation (PCM) [8] simply uses each sample value $f(n/M)$ with L bits: one bit for its sign, followed by the first $L-1$ bits of the binary expansion of $f(n/M)$. It is possible to show that for a bandlimited signal, this algorithm achieves precision of order $O(2^{-L})$. On the other hand, $\Sigma\Delta$ modulation [1], [2], [9], [10], [11], another commonly implemented quantisation algorithm for a bandlimited function, achieves precision that decays like an inverse polynomial in the bit budget L. For example, a kth-order $\Sigma\Delta$ scheme produces an approximation where the distortion is of the order $O(L^{-k})$. Although PCM is superior to $\Sigma\Delta$ modulation in its level of distortion for a given bit budget, $\Sigma\Delta$ modulation has practical features for analog circuit implementation. One of the key features is a ceratain self-correction property for quantiser threshold errors (bias) that is not shared by PCM. This is one of several reasons why $\Sigma\Delta$ modulation is preferred for A/D conversion in practice.

In 2002, Daubechies *et al.* [12] introduced a new architecture for A/D converters called the β*-encoder* and showed the interesting result that it has exponential accuracy even if the β-encoder is iterated at each step in successive approximation of each sample using an imprecise quantiser with a quantisation error and an offset parameter. Furthermore, in a subsequent paper [13], they introduced a "flaky" version of an imperfect quantiser, defined as

$$Q^f_{[\nu_0,\nu_1]}(z) = \begin{cases} 0, & \text{if } z \le \nu_0, \\ 1, & \text{if } z \ge \nu_1, \\ 0 \text{ or } 1, & \text{if } z \in (\nu_0,\nu_1), \end{cases} \tag{2}$$

where $1 \le \nu_0 < \nu_1 \le (\beta-1)^{-1}$ and made the remarkable observation that "greedy" and "lazy" as well as "cautious"[1] expansions in the β-encoder with such a flaky quantiser exhibit exponential accuracy in the bit rate. This β-encoder was a milestone in oversampled A/D and D/A conversions in the sense that it may become a good alternative to PCM. The primary reason is that the β-encoder consists of an analog circuit, with an amplifier with the factor β, a single-bit

---

T. Kohda and S. Hironaka are with the Department of Computer Science and Communication Engineering, Kyushu University Motooka 744, Nishi-ku, Fukuoka-city 819-0395, Japan, Phone +81-92-802-3623, Fax +81-92-802-3627, (email: kohda@csce.kyushu-u.ac.jp)

K. Aihara is with the Department of Mathematical Engineering and Information Physics, Faculty of Engineering, Tokyo University and Aihara Complexity Modeling Project, ERATO, JST

[1] Intermediate expansions [14] between the greedy and lazy expansions are called "cautious" by Daubechies *et al.* [13].

quantiser with the threshold ν and a single feedback loop for successive L-bit quantisation of each sample which uses the bit-budget efficiently, like PCM. The β-encoder further guarantees the robustness of both β and ν against fluctuations like $\Sigma\Delta$ modulation. Nevertheless, it provides a simple D/A conversion using the estimated β without knowing the exact value of β with its offset in the A/D conversion [15].

This paper is devoted to dynamical systems theory for studying ergodic-theoretic and probabilistic properties of the β-encoder as a nonlinear system with feedback. We emphasize here that the flaky quantiser $Q^f_{\Delta_\beta}(\cdot)$ is exactly realized by the multi-valued Rényi map (*i.e.,* β-transformation) [20] on the middle interval $\Delta_\beta = [\beta^{-1}, \beta^{-1}(\beta-1)^{-1}]$ so that probabilistic behavior in the "flaky region" Δ_β is completely explained using dynamical systems theory. Our purpose is to give a "dynamical" version of Daubechies *et al.*'s proof for the exponential accuracy of the β-encoder as follows. We can observe that a sample x is always confined to a subinterval of the contracted interval defined in this paper while the successive approximation of x is *stably*[2] performed using β-expansion even if ν may vary at each iteration. This enables us to obtain the decoded sample easily, as it is equal to the midpoint of the subinterval, and it also yields the characteristic equation for recovering β which improves the quantisation error by more than 3dB over Daubechies *et al.*'s bound when $\beta > 1.5$. Furthermore, two classic β-expansions, known as the *greedy* and *lazy* expansions are proven to be perfectly symmetrical in terms of their quantisation errors. The invariant subinterval of the Rényi map further suggests that ν should be set to around the midpoint of its associated greedy and lazy values. This paper presents a radix expansion of a real number in a negative real base, called *a negative β-expansion* and a *negative β-encoder* in order to make stable analog circuit implementation easier. Finally we observe a clear difference between a sequence of independent and identically distributed (i.i.d.) binary random variables generated by PCM and a binary sequence generated by the β-encoder based on the viewpoint that if the latter sequence is regarded as a 2-state Markov chain with a 2×2 transition probability matrix, then the matrix has a negative eigenvalue.

First, we survey PCM from the viewpoint of dynamical systems because it is a typical example of a nonlinear map. PCM is an A/D converter that realizes binary expansion in the analog world. The binary expansion of a given real number $r \in [-1, 1]$ has the form

$$r = b_{0,B} \sum_{i=1}^{\infty} b_{i,B} 2^{-i}, \tag{3}$$

where $b_{0,B} = b_{0,B}(r) \in \{-1, 1\}$ is the sign bit, and $b_{i,B} = b_{i,B}(r) \in \{0, 1\}$ $i \geq 1$ are the binary digits of $|r|$. We define the quantiser function $Q_1(\cdot)$ as

$$Q_1(x) = \begin{cases} 0, & x < 1, \\ 1, & x \geq 1. \end{cases} \tag{4}$$

Then we have $b_{i,B}$ which can be computed by the following algorithm. Let $u_1 = 2|r|$; the first bit $b_{1,B}$ is then given by $b_{1,B} = Q_1(u_1)$. The remaining bits are determined recursively: if u_i and $b_{i,B}$ have been given, then we can define

$$u_{i+1} = 2(u_i - b_{i,B}) \tag{5}$$

and

$$b_{i+1,B} = Q_1(u_{i+1}), \tag{6}$$

respectively. Such a sequence is also obtained with the Bernoulli shift map $B(x)$ [16], [17], [18], defined by

$$B(x) = 2x \bmod 1 = \begin{cases} 2x, & x < 1/2, \\ 2x - 1, & x \geq 1/2, \end{cases} \tag{7}$$

and its associated bit sequence $b_{i,B} (i = 1, 2, \ldots)$, defined by

$$b_{i,B} = \begin{cases} 0, & B^{i-1}(x) < 1/2, \\ 1, & B^{i-1}(x) \geq 1/2. \end{cases} \tag{8}$$

Iterating $B(x)$ for $x \in [0, 1)$ gives

$$B^{i+1}(x) = 2B^i(x) - b_{i,B},\ i = 1, 2, \cdots, L \in \mathbb{N}. \tag{9}$$

Then

$$\begin{aligned} B^L(x) &= 2(\cdots 2(2x - b_{1,B}) - b_{2,B} \cdots) - b_{L,B} \\ &= 2^L x - \sum_{i=1}^{L} b_{i,B} 2^{L-i} \end{aligned} \tag{10}$$

or

$$x = \sum_{i=1}^{L} b_{i,B} 2^{-i} + 2^{-L} B^L(x). \tag{11}$$

Hence $2^{-L} B^L(x) = 0$ as $L \to \infty$ because $B^L(x) \in [0, 1)$. That is, we get the binary expansion of x:

$$x = \sum_{i=1}^{\infty} b_{i,B} 2^{-i}. \tag{12}$$

Suppose that a threshold shift ρ occurs. Let $B_\rho(x)$ be the resulting map:

$$B_\rho(x) = \begin{cases} 2x, & x < (1+\rho)/2, \\ 2x - 1, & x \geq (1+\rho)/2, \end{cases} \tag{13}$$

and $b_{i,B_\rho} (i = 1, 2, \ldots)$ its bit sequence:

$$b_{i,B_\rho} = \begin{cases} 0, & B_\rho^{i-1}(x) < (1+\rho)/2, \\ 1, & B_\rho^{i-1}(x) \geq (1+\rho)/2. \end{cases} \tag{14}$$

Then we have its associated binary expansion of x, defined as

$$x = \sum_{i=1}^{L} b_{i,B_\rho} 2^{-i} + 2^{-L} B_\rho^L(x). \tag{15}$$

When $\rho > 0$, we have $B_\rho(x) : [0, 1) \to [0, 1+\rho)$ for $x \in [0, 1)$. Iterating $B_\rho(x)$ L times gives $B_\rho^L(x) : [0, 1) \to [0, 1+2^{L-1}\rho)$. Thus we have

$$0 \leq x - \sum_{i=1}^{L} b_{i,B_\rho} 2^{-i} < 2^{-L} + \frac{\rho}{2}. \tag{16}$$

---

[2] A small real-valued quantity, approximately proportional to the quantisation error, does not necessarily converge to any fixed value, *e.g.,* 0 but may oscillate without diverging as discussed later in detail. Such a phenomenon is sometimes referred to as *chaos*.

Conversely, suppose that $\rho < 0$; then we get $B_\rho(x) : [0,1) \to [\rho, 1)$ for $x \in [0,1)$. Iterating $B_\rho(x)$ L times gives $B_\rho^L(x) : [0,1) \to [2^{L-1}\rho, 1)$ which implies that

$$\frac{\rho}{2} \le x - \sum_{i=1}^{L} b_{i,B_\rho} 2^{-i} \le 0. \tag{17}$$

Both (16) and (17) show that an A/D conversion does not work well because the quantisation errors don't decay. Figure 1 shows the divergence of a value x in PCM when there is a threshold shift $\rho > 0$. Such a map must be a mapping interval into interval (or at least a mapping interval onto interval) so that the A/D conversion operates normally. Fluctuations of the threshold are inevitable because every A/D converter is implemented as an analog circuit.

However, β-encoders which realize β-*expansion* using the expansion by $\beta \in (1,2)$ as a radix, overcome this problem. The block diagram of the β-encoder is shown in Fig.2 with the amplifier $\beta \in (1,2)$ and the quantiser Q_ν. The quantiser Q_ν is defined by

$$Q_\nu(x) = \left\{ \begin{array}{ll} 0, & x < \nu, \\ 1, & x \ge \nu, \end{array} \right. \quad \nu \in [1, (\beta-1)^{-1}]. \tag{18}$$

Note that the β-encoder with $\beta = 2$ and $\nu = 1$ provides the PCM. The bit sequences $b_{i,\beta}$ can be calculated recursively as follows. Let $u_1 = \beta x$; the first bit $b_{1,\beta}$ is then given by $b_{1,\beta} = Q_\nu(u_1)$. The remaining bits are obtained recursively; given u_i and $b_{i,\beta}$, we define $u_{i+1} = \beta(u_i - b_{i,\beta})$ and $b_{i+1,\beta} = Q_\nu(u_{i+1})$. Daubechies *et al.* [12], [13], [15] introduced the flaky quantiser, defined by Eq.(2) and gave the important result that the β-encoder can perform normally and has exponential accuracy even if the quantiser threshold ν fluctuates over the interval $[1, (\beta-1)^{-1}]$.

II. BASICS OF DYNAMICAL SYSTEMS THEORY

We deal exclusively with the *asymptotic behavior* exhibited by a dynamical system. In particular, we limit ourselves to a map of an interval I, called an *interval map* [17], [18]. The following short review of the fundamentals [19] is provided to explain the dynamics of the β-maps.

Given $E \subset \mathbb{R}$ and the continuous map $\tau : E \to E$, the set E and the map τ form a *dynamical system*, denoted by (E, τ).

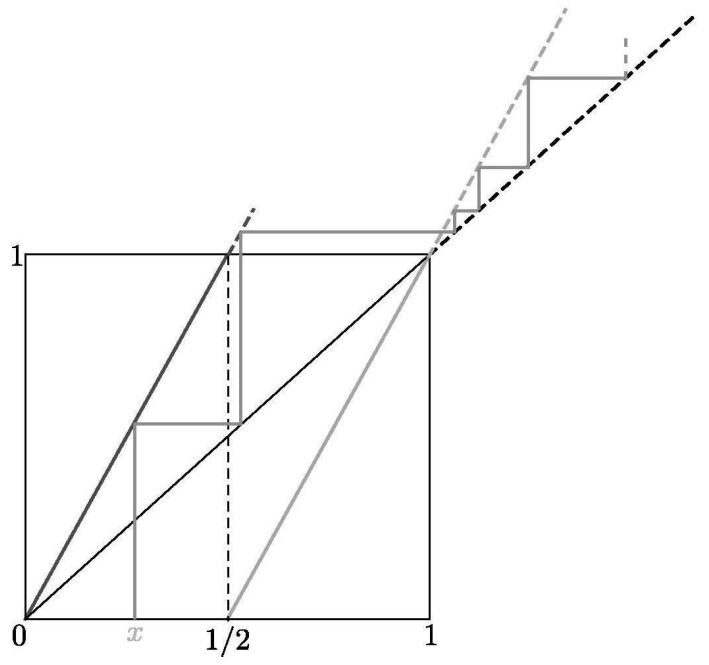

Fig. 1. The divergence of a value x in PCM when there is a threshold shift $\rho > 0$.

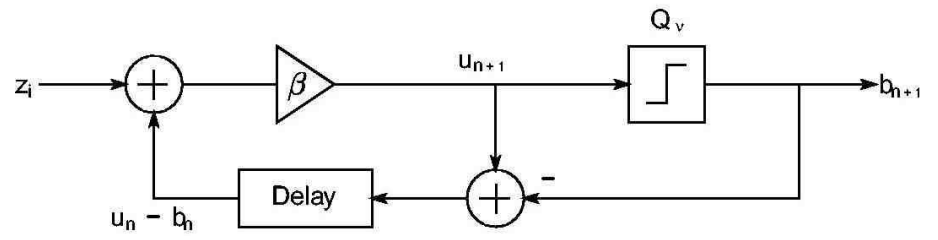

Fig. 2. A β-encoder: for input $z_0 = y \in [0,1), z_i = 0, i > 1$, and "initial conditions" $u_0 = 0$ and $b_{0,\beta} = 0$, the output $(b_{i,\beta})_{i \ge 1}$ gives the β-expansion for y defined by the quantiser $Q_\nu = Q_1(\cdot/\nu)$, with $\nu \in [1, (\beta-1)^{-1}]$. This provides the "greedy" and "lazy" schemes for $\nu = 1$ and $\nu = (\beta-1)^{-1}$, respectively. The β-encoder with $\beta = 2$ and $\nu = 1$ gives PCM.

For a given $x \in I$ a sequence of forward iterates

$$x, \tau(x), \tau^2(x) = \tau(\tau(x)), \tau^3(x) = \tau(\tau(\tau(x))), \ldots \tag{19}$$

is referred to as the *forward trajectory* (or *orbit*) of x. We call $F \subset E$ *invariant* if $\tau(F) \subset F$. We call $f : E_1 \to E_2$ a *homeomorphism* if f is one-to-one and both f and f^{-1} are continuous. If, in addition, f is onto, we call f an *onto homeomorphism*. Let $f : A \to A$ and $g : B \to B$ be given. We say that f and g are *topologically conjugate* if there is an onto homeomorphism $h : A \to B$ such that $h \circ f = g \circ h$. The homeomorphism h is called the *conjugacy* between f and g. We say that a map τ with its invariant subinterval J is *locally eventually onto* if for every $\varepsilon > 0$ there exists $M \in \mathbb{N}$ such that, if U is an interval with $|U| > \varepsilon$ and if $n \ge M$, then $\tau^n(U) = J$.

One of the main problems in dynamical systems theory is to describe the distribution of orbits. That is, we wish to know how the iterates of points under an interval map vary over the interval. Ergodic theory provides answers to such questions, particularly the notions of the ergodicity and the invariant measure. Let μ be an absolutely continuous invariant measure for the map τ, then we have the following theorem.

Birchoff Ergodic theorem: [17], [18], [19]

(i) Let τ be a *measure preserving* map of an interval I. Then for any integrable function $h(x)$, the *time average* $\lim_{N\to\infty} \frac{1}{N} \sum_{i=0}^{N-1} h(\tau^i(x))$ exists for almost all $x \in I$ with respect to μ.

(ii) If, in addition, τ is *ergodic*, then the time average is equal to the *space average* $\int h d\mu$ for almost every x with respect to μ.

The first important result on the existence of an absolutely continuous invariant measure is now considered to be a *folklore theorem* which originated with the basic result due to Rényi [20]. His key idea has been used in more general proofs by Adler and Flatto[21].

Definition 1 *Let I be an interval and $\{I_i\}$ be a finite partition of I into subintervals. Let $\tau : I \to I$ satisfy the following conditions:*

1) *piecewise smoothness, i.e., $\tau|_{I_i}$ has a C^2-extension to the closure $\overline{I}_i$ of I_i.*
2) *local invertibility, i.e., $\tau|_{I_i}$ is strictly monotonous.*
3) *Markov property, i.e., $\tau(\overline{I}_i) =$ union of several $\overline{I}_j$.*
4) *Aperiodicity, i.e., there exists an integer p such that $\tau^p(\overline{I}_i) = \overline{I}$ for all i.*

If 1)-3) hold, then $\{I_i\}$ is called a Markov partition for τ (or

τ is a Markov map for $\{I_i\}$). [3]

Condition 4) is added to ensure that the following theorem holds.

Folklore theorem: *Assume that 1)-4) hold and that τ is eventually expansive, i.e., for some iterate τ^n, $|d\tau^n/dx| \geq \theta > 1$ for all x. Then τ has a finite Lesbesgue-equivalent measure m and furthermore $dm = \rho(x)dx$, where $\rho(x)$ is piecewise continuous and $D^{-1} < \rho < D$ for some D.*

Under conditions 1)-4), the converse of the folklore theorem also holds.

III. MULTI-VALUED RÉNYI MAP AND FLAKY QUANTISER

The β-expansion ($\beta > 1, \beta \notin \mathbb{Z}$) is obtained as a basis of the β-encoder according to the classic ergodic theory [20], [22], [23], [24], [25], [26]. Rényi [20] defined the β-transformation: $x \mapsto \beta x \mod 1$ for real numbers $x \in (0, 1]$ and $\beta > 1$. Gelfond [22] and Parry [23] gave its finite invariant measure. Parry [24] defined the linear modulo one transformation (or (β, α)-transformation, a generalized Rényi map): $x \mapsto \beta x + \alpha \mod 1$ for real numbers $x \in (0, 1]$ and $\beta \geq 1$, $0 \leq \alpha < 1$, and gave a finite invariant measure for a (strongly) ergodic linear modulo one transformation as follows.

Parry's result [23], [24]: *If τ is a linear modulo one transformation ($\tau(x) = \beta x + \alpha \mod 1$, $\beta > 1$, $0 \leq \alpha < 1$), then $\nu(E) = \int_E \rho(x)dx$ is a finite signed measure invariant under τ, where $\rho(x)$ is an unnormalized density given as*

$$\rho(x) = \sum_{x<\tau^n(1)} \gamma^n, \text{ for } \alpha = 0 \text{ ([22], [23])}, \tag{20}$$

$$\rho(x) = \sum_{x<\tau^n(1)} \gamma^n - \sum_{x<\tau^n(0)} \gamma^n, \text{ for } \alpha \neq 0 \text{ ([24])}, \tag{21}$$

with $\gamma = \beta^{-1}$. If τ is strongly ergodic, then $\rho(x) \geq 0$ for almost all x and ν is a finite positive measure invariant under τ.

Erdös *et al.* [25], [26] showed that the β-expansion has multiple representations of a real number $x \in [0, (\beta-1)^{-1})$ as follows. They introduced the lexicographic order $\overset{\text{L}}{<}$ on the real sequences:$(b_i) \overset{\text{L}}{<} (b'_i)$ if there is a positive integer m such that $b_i = b'_i$ for all $i < m$ and $b_m < b'_m$. It is easy to verify that for every fixed x with $0 \leq x \leq (\beta-1)^{-1}$ in the set of all expansions of x, there exist a maximum and a minimum with respect to this order, namely the so-called *greedy* and *lazy* expansions. The greedy expansions were studied originally by Rényi [20], where they were called β-expansions. A number x has a unique expansion if and only if its greedy and lazy expansions coincide. Erdös *et al.* defined the bit sequence of these expansions recursively as follows: if $m \geq 1$ and if the bit sequence b_i of the greedy expansion of x is defined for all $i < m$, then we set

$$b_m = \begin{cases} 1, & \sum_{i<m} b_i\gamma^i + \gamma^m \leq x, \\ 0, & \sum_{i<m} b_i\gamma^i + \gamma^m > x. \end{cases} \tag{22}$$

If $m \geq 1$ and if the bit sequence b_i of the lazy expansion of x is defined for all $i < m$, then we set

$$b_m = \begin{cases} 0, & \sum_{i<m} b_i\gamma^i + \sum_{i>m} \gamma^i \geq x, \\ 1, & \sum_{i<m} b_i\gamma^i + \sum_{i>m} \gamma^i < x. \end{cases} \tag{23}$$

Erdös *et al.* [26] noted the following duality of the greedy and lazy expansions. Given $x \in [0, (\beta-1)^{-1})$, we define $\psi(x)$ by

$$\psi(x) = (\beta-1)^{-1} - x. \tag{24}$$

Using the trivial relation $\sum_{i<m} b_i\gamma^i + \sum_{i>m} \gamma^i = (\beta-1)^{-1} - \sum_{i<m} \overline{b}_i\gamma^i - \gamma^m$, we can rewrite Eq.(23) as

$$b_m = \begin{cases} 0, & (\beta-1)^{-1} - \sum_{i<m} \overline{b}_i\gamma^i - \gamma^m \geq x, \\ 1, & (\beta-1)^{-1} - \sum_{i<m} \overline{b}_i\gamma^i - \gamma^m < x, \end{cases} \tag{25}$$

or

$$b_m = \begin{cases} 0, & \sum_{i<m} \overline{b_i}\gamma^i + \gamma^m \leq \psi(x), \\ 1, & \sum_{i<m} \overline{b_i}\gamma^i + \gamma^m > \psi(x), \end{cases} \tag{26}$$

where $\overline{b}_i = 1 - b_i$. Introducing $c_i = \overline{b_i}$, we get the greedy expansion of $\psi(x)$:

$$c_m = \begin{cases} 1, & \sum_{i<m} c_i\gamma^i + \gamma^m \leq \psi(x), \\ 0, & \sum_{i<m} c_i\gamma^i + \gamma^m > \psi(x), \end{cases} \tag{27}$$

which has the dual roles of the greedy expansion $\{b_i\}$ of x and the lazy expansion $\{b_i\}$ of x, i.e., the greedy expansion $\{c_i\}$ of $\psi(x)$.

We now define several different kinds of dynamical systems governed by multi-valued Rényi maps on the middle interval $\Delta_\beta = [\gamma, \gamma(\beta-1)^{-1}]$ that realize Daubechies *et al.*'s flaky quantiser $Q^f_{\Delta_\beta}(\cdot)$, defined by Eq.(2) as follows.

Let $C_{\beta,\nu}(x)$ be the cautious map, shown in Fig.3(a), defined by

$$C_{\beta,\nu}(x) = \begin{cases} \beta x, & x < \gamma\nu, \\ \beta x - 1, & x \geq \gamma\nu, \end{cases} \quad \nu \in (1, (\beta-1)^{-1}), \tag{28}$$

which determines the flaky quantiser $Q^f_{[\gamma,\gamma(\beta-1)^{-1}]}(\cdot)$ and gives its associated bit sequence $\{b_{i,C^i_{\beta,\nu}}\}_{i=1}^{\infty}$, defined by

$$b_{i,C^i_{\beta,\nu}} = \begin{cases} 0, & C^{i-1}_{\beta,\nu}(x) < \gamma\nu, \\ 1, & C^{i-1}_{\beta,\nu}(x) \geq \gamma\nu. \end{cases} \tag{29}$$

Then we get the following cautious expansion of x by the map $C_{\beta,\nu}(x)$

$$x = \sum_{i=1}^{m-1} b_{i,C^i_{\beta,\nu}}\gamma^i + \gamma^{m-1}C^{m-1}_{\beta,\nu}(x), \tag{30}$$

which implies that each $x \in [0, (\beta-1)^{-1}]$ has a representation

$$x = \sum_{i=1}^{\infty} b_{i,C^i_{\beta,\nu}}\gamma^i, \quad b_{i,C^i_{\beta,\nu}} \in \{0, 1\} \tag{31}$$

because $\gamma^{m-1}C^{m-1}_{\beta,\nu}(x) = 0$ when $m \to \infty$. The cautious expansion map $C_{\beta,\nu}(x)$, $\nu \in (1, (\beta-1)^{-1})$ with a unique point of discontinuity $c = \gamma\nu$ has its strongly invariant subinterval $[\nu-1, \nu]$ because the map $C_{\beta,\nu}(x)$ is *locally eventually onto* as shown in Fig.3(a). This map defines its dynamical system, defined as $([\nu-1, \nu), C_{\beta,\nu}(x))$, which is illustrated by the bold lines in Fig.3(a).

---

[3] The Bernoulli shift map is a typical example of a map satisfying 1)-4).

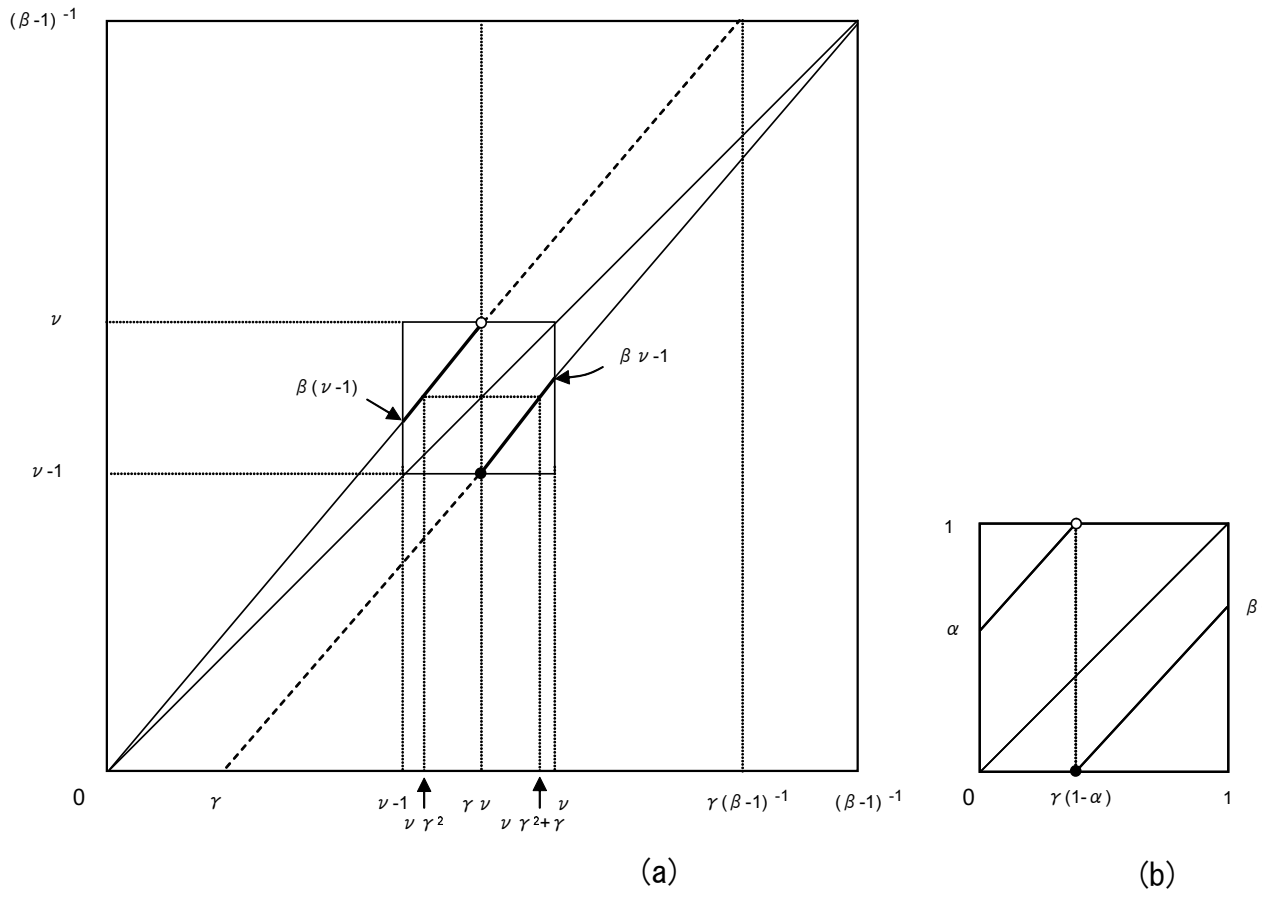

Fig. 3. (a) "*cautious*"-expansion map [13]: $C_{\beta,\nu}(x)$ for $1 < \nu < (\beta-1)^{-1}$, which is locally eventually onto $[\nu-1,\nu]$. Renormalizing the interval $[\nu-1,\nu]$ into the unit interval $[0,1]$ shows that such a locally eventually onto map is equivalent to the Parry's linear modulo one transformation (or (β,α)-map) as shown in (b).

Let $\nu_1^i = \nu_1 \cdots \nu_i$ be an abbreviation for a sequence of i thresholds $\nu_j \in [1,(\beta-1)^{-1}]$, $1 \le j \le i$. Let C^i_{β,ν_1^i} and $b_{i,C^i_{\beta,\nu_1^i}}$ be the i-iterated map, recursively defined as

$$C^i_{\beta,\nu_1^i}(x) = C_{\beta,\nu_i}(C^{i-1}_{\beta,\nu_1^{i-1}}(x)) = C_{\beta,\nu_i}(C_{\beta,\nu_{i-1}}(C^{i-2}_{\beta,\nu_1^{i-2}}(x))) \tag{32}$$

and its associated binary random variable, defined as

$$b_{i,C^i_{\beta,\nu_1^i}} = \begin{cases} 0, & C^{i-1}_{\beta,\nu_1^{i-1}}(x) < \gamma\nu_i, \\ 1, & C^{i-1}_{\beta,\nu_1^{i-1}}(x) \ge \gamma\nu_i, \end{cases} \tag{33}$$

respectively. Then the cautious expansion of x by the map $C_{\beta,\nu}(x)$ using the threshold sequence ν_1^L is

$$x = \sum_{i=1}^{L} b_{i,C^i_{\beta,\nu_1^i}} \gamma^i + \gamma^L C^L_{\beta,\nu_1^L}(x), \tag{34}$$

i.e., the onto-mapping relation $0 \le C^L_{\beta,\nu_1^L}(x) \le (\beta-1)^{-1}$ tells us that the sample x is always confined to the Lth stage subinterval, defined by

$$I_{L,C^L_{\beta,\nu_1^L}}(x) = [\sum_{i=1}^{L} b_{i,C^i_{\beta,\nu_1^L}} \gamma^i, \sum_{i=1}^{L} b_{i,C^i_{\beta,\nu_1^L}} \gamma^i + (\beta-1)^{-1}\gamma^L), \tag{35}$$

where successive approximations to x in the β-expansion are performed using ν_1^L. This elementary observation is important in discussing the contraction process of the interval by β-expansion. In order to avoid shortcuts in proving the above observation, it is worthwhile to discuss the quantiser in two different situations separately: the case where a fixed sequence $\nu_1^L = \underbrace{\nu^* \cdots \nu^*}_{L\,\text{times}}$, $\nu^* \in [1,(\beta-1)^{-1}]$ is used and the one where a varying sequence $\nu_1^L = \nu_1 \cdots \nu_i \cdots \nu_L$, $\nu_i = \nu^*(1+u_i) \in [1,(\beta-1)^{-1}]$, $1 \le i \le L$ with a bounded random fluctuation u_i is used.

Assume for simplicity that the quantiser threshold $\nu^* \in [1,(\beta-1)^{-1}]$ is fixed. Let us consider the special case where $\nu_i = 1$ (or $\nu_i = (\beta-1)^{-1}$), $1 \le i \le L$ then it is called the "*steady*" greedy (or lazy) expansion, *i.e.*, the classic greedy (or lazy) expansion.

Let $C_{\beta,1}(x)$ be the greedy expansion map, defined by

$$C_{\beta,1}(x) = \begin{cases} \beta x, & x < \gamma, \\ \beta x - 1, & x \ge \gamma, \end{cases} \tag{36}$$

and $b_{i,C^i_{\beta,1}}$ its associated bit sequence, defined by

$$b_{i,C^i_{\beta,1}} = \begin{cases} 0, & C^{i-1}_{\beta,1}(x) < \gamma, \\ 1, & C^{i-1}_{\beta,1}(x) \ge \gamma, \end{cases} \quad i = 1,2,\ldots. \tag{37}$$

Then the following is the greedy expansion of x by the map $C_{\beta,1}(x)$:

$$x = \sum_{i=1}^{m-1} b_{i,C^i_{\beta,1}} \gamma^i + \gamma^{m-1} C^{m-1}_{\beta,1}(x). \tag{38}$$

Equivalently, we have

$$\sum_{i<m} b_{i,C^i_{\beta,1}} \gamma^i = x - \gamma^{m-1} C^{m-1}_{\beta,1}(x) \tag{39}$$

which enables us to rewrite Eq.(37) as follows:

$$\begin{aligned} & b_{m,C^m_{\beta,1}} = \begin{cases} 1, & C^{m-1}_{\beta,1}(x) \ge \gamma, \\ 0, & C^{m-1}_{\beta,1}(x) < \gamma, \end{cases} \\ \Leftrightarrow \quad & b_{m,C^m_{\beta,1}} = \begin{cases} 1, & x - \gamma^{m-1} C^{m-1}_{\beta,1}(x) + \gamma^m \le x, \\ 0, & x - \gamma^{m-1} C^{m-1}_{\beta,1}(x) + \gamma^m > x, \end{cases} \\ \Leftrightarrow \quad & b_{m,C^m_{\beta,1}} = \begin{cases} 1, & \sum_{i<m} b_{i,C^i_{\beta,1}} \gamma^i + \gamma^m \le x, \\ 0, & \sum_{i<m} b_{i,C^i_{\beta,1}} \gamma^i + \gamma^m > x. \end{cases} \end{aligned}$$

This suggests that $b_{m,C^m_{\beta,1}}$ in Eq.(37) is equal to b_m in Eq.(22).

Let $C_{\beta,(\beta-1)^{-1}}(x)$ be the lazy expansion map defined by

$$C_{\beta,(\beta-1)^{-1}}(x) = \begin{cases} \beta x, & x \le \gamma(\beta-1)^{-1}, \\ \beta x - 1, & x > \gamma(\beta-1)^{-1}, \end{cases} \tag{40}$$

and $b_{i,C^i_{\beta,(\beta-1)^{-1}}}$ $(i = 1,2,\ldots)$ its associated bit sequence, defined by

$$b_{i,C^i_{\beta,(\beta-1)^{-1}}} = \begin{cases} 0, & C^{i-1}_{\beta,(\beta-1)^{-1}}(x) \le \gamma(\beta-1)^{-1}, \\ 1, & C^{i-1}_{\beta,(\beta-1)^{-1}}(x) > \gamma(\beta-1)^{-1}. \end{cases} \tag{41}$$

Then the following is the lazy expansion of x by the map $C_{\beta,(\beta-1)^{-1}}(x)$:

$$x = \sum_{i=1}^{m-1} b_{i,C^i_{\beta,(\beta-1)^{-1}}} \gamma^i + \gamma^{m-1} C^{m-1}_{\beta,(\beta-1)^{-1}}(x) \tag{42}$$

Equivalently, we get

$$\sum_{i<m} b_{i,C^i_{\beta,(\beta-1)^{-1}}} \gamma^i = x - \gamma^{m-1} C^{m-1}_{\beta,(\beta-1)^{-1}}(x) \tag{43}$$

which enables us to rewrite Eq.(41) as follows:

$$\begin{aligned} & b_{m,C^m_{\beta,(\beta-1)^{-1}}} = \begin{cases} 0, C^{m-1}_{\beta,(\beta-1)^{-1}}(x) \le \gamma(\beta-1)^{-1}, \\ 1, C^{m-1}_{\beta,(\beta-1)^{-1}}(x) > \gamma(\beta-1)^{-1}, \end{cases} \\ \Leftrightarrow & b_{m,C^m_{\beta,(\beta-1)^{-1}}} = \begin{cases} 0, \sum_{i<m} b_{i,C^i_{\beta,(\beta-1)^{-1}}} \gamma^i + \sum_{i>m} \gamma^i \ge x, \\ 1, \sum_{i<m} b_{i,C^i_{\beta,(\beta-1)^{-1}}} \gamma^i + \sum_{i>m} \gamma^i < x, \end{cases} \end{aligned}$$

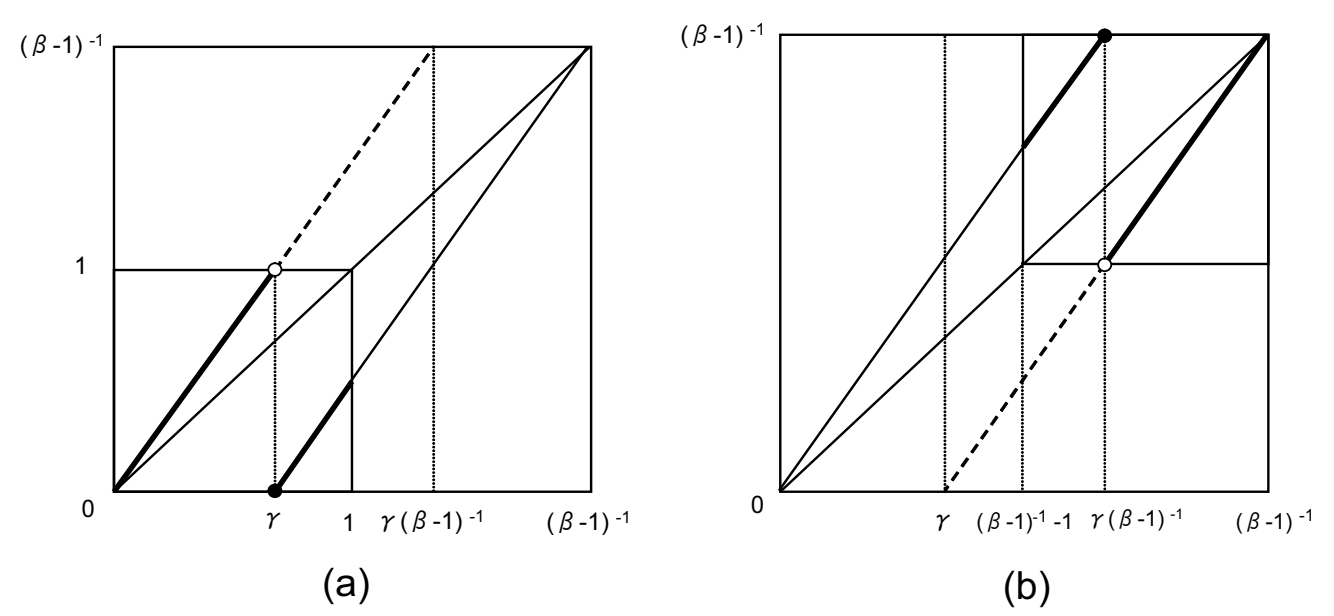

Fig. 4. (a) Greedy-expansion map:$C_{\beta,1}(x)$, which is locally eventually onto $[0,1)$ and (b) lazy-expansion map: $C_{\beta,(\beta-1)^{-1}}(x)$, which is locally eventually onto $[(\beta-1)^{-1}-1,\,(\beta-1)^{-1})$. These multivalued maps on the middle interval $\Delta_\beta=[\gamma,\gamma(\beta-1)^{-1}]$ corresponds exactly to the flaky quantiser $Q^f_{\Delta_\beta}(\cdot)$.

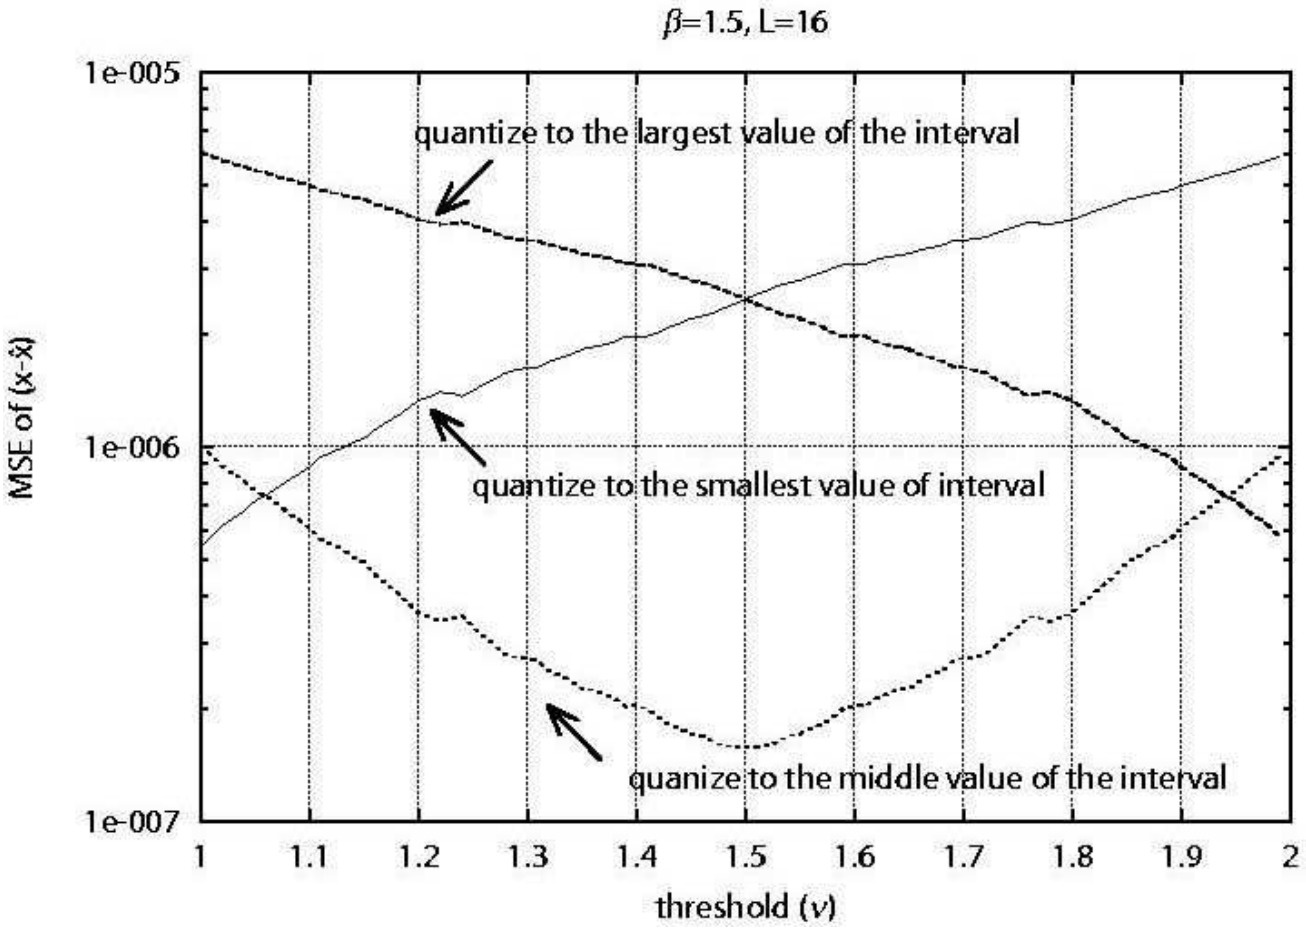

Fig. 5. The MSE$(\widehat{x}_{L,C^L_{\beta,\nu^*}}(\gamma,p_L)), 0\le p_L\le 2$ using the exact β of the β-encoder with $\beta=1.5$, $L=16$, and fixed $\nu^*\in[1,(\beta-1)^{-1}]$.

because $\sum_{i>m}\gamma^i=(\beta-1)^{-1}\gamma^m$. This suggests that $b_{m,C^m_{\beta,(\beta-1)^{-1}}}$ in Eq.(41) is equal to b_m in Eq.(23).

Let $\tau: I\to I$ be an interval map with a unique point of discontinuity c such that $\tau(c^-)=\lim_{t\uparrow c}\tau(t)$ is not equal to $\tau(c^+)=\lim_{t\downarrow c}\tau(t)$. To each $x\in I$ we associate an element of $\{0,1,*\}^{\mathbb{N}}$ by listing the sequence of adresses of the forward orbit of x, called the *itinerary of x under the map $\tau(x)$*, denoted as $\mathbf{s}_\tau(x)=(s_0,s_1,\cdots,s_n,\ldots)$, is defined by:

$$s_j=\begin{cases}0, & \text{if } \tau^j(x)<c,\\ *, & \text{if } \tau^j(x)=c,\\ 1, & \text{if } \tau^j(x)>c.\end{cases} \tag{44}$$

Let $\sigma:\Sigma=\{0,*,1\}^N\to\Sigma$ be the shift map:

$$\sigma(\mathbf{s}_\tau)=\mathbf{t}_\tau=(t_1,t_2,\cdots,t_n,\ldots),\text{ such that } t_i=s_{i+1}. \tag{45}$$

We adopt the convention that if, for some j, we have $s_j=*$, then we stop the sequence, that is, the itinerary is a finite string. Hence, if $\tau^n(x)\neq c$ for all n, then $\mathbf{s}_\tau(x)\in\{0,1\}^{\mathbb{N}}$.

Figure 4 (a) (or (b)) shows such a greedy (or lazy) expansion map $C_{\beta,1}(x)$ (or $C_{\beta,(\beta-1)^{-1}}(x)$) with a unique point of discontinuity $c=\gamma$ (or $c=\gamma(\beta-1)^{-1}$) which corresponds exactly to the flaky quantiser $Q^f_{[\gamma,\gamma(\beta-1)^{-1}]}(\cdot)$ and also has its strongly invariant subinterval $[0,1)$ (or $(\beta-1)^{-1}-1,(\beta-1)^{-1})$) because of its *locally eventually onto-mapping*. Such a map defines the greedy (or lazy) dynamical system, defined as $([0,1),C_{\beta,1}(x))$ (or $([(\beta-1)^{-1}-1,(\beta-1)^{-1}),C_{\beta,(\beta-1)^{-1}}(x))$) which is illustrated by the bold lines in Fig.4 (a) (or (b)). The strongly invariant subinterval associated with the L-iterated greedy (or lazy) map $C^L_{\beta,1}(x)$ (or $C^L_{\beta,(\beta-1)^{-1}}(x)$), corresponds to the subinterval, defined as

$$I^{\text{invariant}}_{L,C^L_{\beta,1}}(x)=[\sum_{i=1}^{L}b_{i,C^i_{\beta,1}}\gamma^i,\sum_{i=1}^{L}b_{i,C^i_{\beta,1}}\gamma^i+\gamma^L), \tag{46}$$

(or

$$I^{\text{invariant}}_{L,C^L_{\beta,(\beta-1)^{-1}}}(x)=[\sum_{i=1}^{L}b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i+\gamma^L((\beta-1)^{-1}-1),\\ \sum_{i=1}^{L}b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i+\gamma^L(\beta-1)^{-1})). \tag{47}$$

Dajani and Kraaikamp [14], however, discussed the differences between the error of the greedy expansion of x, defined as $\gamma^L C^L_{\beta,1}(x)$, and that of the lazy expansion of x, defined as $\gamma^L C^L_{\beta,(\beta-1)^{-1}}(x)$, and concluded that "*on average for almost all x, the greedy-convergents, defined as $\sum_{i=1}^{L}b_{i,C^i_{\beta,1}}\gamma^i$, approximate x 'better' than the lazy-convergents of x, defined as $\sum_{i=1}^{L}b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i$*." Furthermore, Daubechies *et al.* [13] used $\widehat{x}^{\textit{Daubechies et al.}}_{L,C^L_{\beta,\nu^L_1}}=\sum_{i=1}^{L}b_{i,C_{\beta,\nu^i_1}}\gamma^i$, here called the "*smallest value of the Lth stage subinterval $I_{L,C^L_{\beta,\nu^L_1}}(x)$*", denoted by $\widehat{x}(\gamma,0)$, and defined by

$$\widehat{x}(\gamma,0)=\sum_{i=1}^{L}b_{i,C^i_{\beta,\nu^i_1}}\gamma^i. \tag{48}$$

Such a decoded value, however, works in favour of the greedy expansion of a sample x, *i.e.*, $\sum_{i=1}^{L}b_{i,C^i_{\beta,1}}\gamma^i$, which is equal to Dajani and Karikaamp's greedy convergent [14] if x is uniformly and independently distributed over the unit interval $[0,1]$. This comes from the fact that the *strongly invariant subinterval* of the *locally eventually onto-(greedy expansion) map* $C^L_{\beta,1}(x)$, $I^{\text{invariant}}_{L,C^L_{\beta,1}}(x)$ is skewed towards the left portion of the interval $I_{L,C^L_{\beta,1}}(x)$.

On the other hand, the "*largest value of the Lth stage subinterval $I_{L,C^L_{\beta,\nu^L_1}}(x)$*", denoted by $\widehat{x}(\gamma,2)$, and defined by

$$\widehat{x}(\gamma,2)=\sum_{i=1}^{L}b_{i,C^i_{\beta,\nu^i_1}}\gamma^i+\gamma^L(\beta-1)^{-1} \tag{49}$$

works in favour of the "*steady*" lazy expansion, *i.e.*, $\sum_{i=1}^{L}b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i$, which is equal to Dajani and Karikaamp's lazy convergent, as shown in Fig.5. That is, the lazy expansion defines the *strongly invariant subinterval* of the *locally eventually onto-(lazy expansion) map* $C^L_{\beta,(\beta-1)^{-1}}(x)$, $I^{\text{invariant}}_{L,C^L_{\beta,(\beta-1)^{-1}}}(x)$, which is skewed towards the right portion of the interval $I_{L,C^L_{\beta,(\beta-1)^{-1}}}(x)$.

Two locally eventually onto Rényi maps, as shown in Fig.3(a) and (b), demonstrate that greedy expansion and lazy expansion maps are symmetrical as follows. The lazy expansion of x and the greedy expansion of $\psi(x)$, respectively defined by

$$\begin{aligned} x &= \sum_{i=1}^{L} b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i + \gamma^L C^L_{\beta,(\beta-1)^{-1}}(x), \\ \psi(x) &= \sum_{i=1}^{L} c_{i,C^i_{\beta,1}}\gamma^i + \gamma^L C^L_{\beta,1}(\psi(x)), \end{aligned} \tag{50}$$

satisfy the following lemma [14]:

Lemma 1: *The greedy map $C^L_{\beta,1}(x)$ and the lazy map $C^L_{\beta,(\beta-1)^{-1}}(x)$ are topologically conjugate, i.e.,*

$$\psi(C^L_{\beta,(\beta-1)^{-1}}(x)) = C^L_{\beta,1}(\psi(x)), L \in \mathbb{Z}. \tag{51}$$

proof: Using Eq.(50) and $c_{i,C^i_{\beta,1}} = \overline{b}_{i,C^i_{\beta,(\beta-1)^{-1}}}$, we get

$$\begin{aligned} x + \psi(x) &= \sum_{i=1}^{L} (b_{i,C^i_{\beta,(\beta-1)^{-1}}} + c_{i,C^i_{\beta,1}})\gamma^i \\ &+ \gamma^L\{C^L_{\beta,(\beta-1)^{-1}}(x) + C^L_{\beta,1}(\psi(x))\} \\ &= \sum_{i=1}^{L} \gamma^i + \gamma^L\{C^L_{\beta,(\beta-1)^{-1}}(x) + C^L_{\beta,1}(\psi(x))\} \\ &= \frac{\gamma - \gamma^{L+1}}{1-\gamma} + \gamma^L\{C^L_{\beta,(\beta-1)^{-1}}(x) + C^L_{\beta,1}(\psi(x))\}. \end{aligned}$$

The trivial relation $x + \psi(x) = (\beta-1)^{-1} = \dfrac{\gamma}{1-\gamma}$ gives

$$(\beta-1)^{-1} = C^L_{\beta,(\beta-1)^{-1}}(x) + C^L_{\beta,1}(\psi(x)),\ L \in \mathbb{Z} \tag{52}$$

or

$$\psi(C^L_{\beta,(\beta-1)^{-1}}(x)) = C^L_{\beta,1}(\psi(x)) \tag{53}$$

which completes the proof. □

This lemma implies that many dynamical properties of the greedy dynamical system are preserved by the conjugacy; that is, topologically conjugate systems are dynamically the same in this sense. [4] These two expansions satisfy the following strong relation which provides a starting point for this study:

Theorem 1: *Let $\widehat{x}_{L,C^L_{\beta,(\beta-1)^{-1}}}$ be the decoded value of x using its lazy expansion $\{b_{i,C^i_{\beta,(\beta-1)^{-1}}}\}_{i=1}^L$, defined by*

$$\widehat{x}_{L,C^L_{\beta,(\beta-1)^{-1}}} = \sum_{i=1}^{L} b_{i,C^i_{\beta,(\beta-1)^{-1}}}\gamma^i + \frac{(\beta-1)^{-1}\gamma^L}{2}. \tag{54}$$

Let $\widehat{\psi(x)}_{L,C^L_{\beta,1}}$ be the decoded value of $\psi(x)$ using its greedy expansion $\{c_{i,C^i_{\beta,1}}\}_{i=1}^L$, defined by

$$\widehat{\psi(x)}_{L,C^L_{\beta,1}} = \sum_{i=1}^{L} c_{i,C^i_{\beta,1}}\gamma^i + \frac{(\beta-1)^{-1}\gamma^L}{2}. \tag{55}$$

Then

$$x - \widehat{x}_{L,C^L_{\beta,(\beta-1)^{-1}}} = \widehat{\psi(x)}_{L,C^L_{\beta,1}} - \psi(x). \tag{56}$$

proof: Equations (54) and (55) immediately yield

$$x - \widehat{x}_{L,C^L_{\beta,(\beta-1)^{-1}}} = \gamma^L\Big(C^L_{\beta,(\beta-1)^{-1}}(x) - \frac{(\beta-1)^{-1}}{2}\Big), \tag{57}$$

$$\begin{aligned} &\widehat{\psi(x)}_{L,C^L_{\beta,1}} - \psi(x) \\ &= \gamma^L\left(\frac{(\beta-1)^{-1}}{2} - C^L_{\beta,1}(\psi(x))\right) \end{aligned} \tag{58}$$

which together with Eq.(53) completes the proof. □

The invariant subinterval of the L-iterated cautious map $C^L_{\beta,\nu^*}(x)$, $\nu^* \in (1, (\beta-1)^{-1})$ is defined as

$$I^{\text{invariant}}_{L,C^L_{\beta,\nu^*}}(x) = [\sum_{i=1}^{L} b_{i,C^i_{\beta,\nu^*}}\gamma^i + \gamma^L(\nu^*-1), \sum_{i=1}^{L} b_{i,C^i_{\beta,\nu^*}}\gamma^i + \gamma^L\nu^*) \tag{59}$$

which has as special cases $I^{\text{invariant}}_{L,C^L_{\beta,1}}(x)$ and $I^{\text{invariant}}_{L,C^L_{\beta,(\beta-1)^{-1}}}(x)$. It is noteworthy that such a map restricted to the invariant subinterval with its *discontinuous point* $c = \gamma\nu$ is the same as Parry's (β,α)-map with its point of discontinuity $c = \gamma(1-\alpha)$ [24], as shown in Fig.3(b), if $\alpha = \beta(\nu-1)$.

Throughout this paper, we assume that the forward orbit of a point of discontinuity $c = \gamma\nu$, $1 \le \nu \le (\beta-1)^{-1}$ under the β-expansion map $C_{\beta,\nu}(x)$ is infinite and that c is not *attracted* to a periodic orbit, meaning that there does not exist an n-periodic point x such that $\lim_{k\to\infty} f^{kn}(c) = x$. Then, the binary sequence $\{b_{i,C^i_{\beta,\nu}}\}_{i=1}^\infty$ governed by $C_{\beta,\nu}(x)$ is exactly the itinerary of x under $C_{\beta,\nu}(x)$.

Remark 1: Let $\tau(\cdot)$ be the greedy, lazy or cautious dynamical system, defined as $([0,1), C_{\beta,1}(x))$, $([(\beta-1)^{-1}-1, (\beta-1)^{-1}), C_{\beta,(\beta-1)^{-1}}(x))$ or $([\nu-1,\nu), C_{\beta,\nu}(x))$, respectively and $M(x) \in \mathbb{N}$ the iteration number of a real number $x \in (0,1]$, called the *first visit time to J of x*, such that $\tau^n(x) \notin J$, $n < M$, $\tau^M(x) \in J$, where J is given by $[0,1)$, $[(\beta-1)^{-1}-1, (\beta-1)^{-1})$ or $[\nu-1,\nu)$, respectively. Then $M(x)$ is a random variable depending on x but if $x \in J$, then $M(x) = 0$.

IV. INTERVAL PARTITION BY β-MAP WITH VARYING ν

Equation (30), substituting $m-1$ by L as well as Eq.(38) (or (42)) as special cases, shows that x can be decomposed into two terms, the principal term at L bit precision and the residue term $\gamma^L C^L_{\beta,\nu^*}(x)$. This enables us to make the elementary observation that x is always confined to the contracted subinterval, defined as

$$I_{L,C^L_{\beta,\nu^*}}(x) = [\sum_{i=1}^{L} b_{i,C^i_{\beta,\nu^*}}\gamma^i, \sum_{i=1}^{L} b_{i,C^i_{\beta,\nu^*}}\gamma^i + \gamma^L(\beta-1)^{-1}) \tag{60}$$

since $0 \le C^L_{\beta,\nu^*}(x) \le (\beta-1)^{-1}$. Both this decomposition of x and the contracted subinterval are obtained under the assumption of fixed ν^* and the *onto-mapping property* of the above three dynamical systems.

We are now ready to study the contraction process of the interval with varying $\nu_i \in [1, (\beta-1)^{-1}]$, $1 \le i \le L$. Consider a "dynamical" version of Daubechies *et al.*'s proof [12], [13],

---

[4] Let $\mu_{\beta,1}$ be the greedy measure whose density is given by $\rho(x)$ for $\alpha = 0$, *i.e.*, $d\mu_{\beta,1} \propto \rho(x)dx$ and $\mu_{\beta,(\beta-1)^{-1}}$ the lazy one, then for any Lesbesgue set $A \subset [0, (\beta-1)^{-1}]$, the relation $\mu_{\beta,(\beta-1)^{-1}}(A) = \mu_{\beta,1}(\psi^{-1}(A))$ holds [14].

[15] for the exponential accuracy of the β-encoder containing the flaky quantiser with its threshold ν_i, where at each iteration the value of ν_i may vary. Since the fluctuating ν_i implies that each mapping is a kind of nonlinear "time-varying" system, we have to examine the binary sequences generated by the map and the exponential accuracy of the β-encoder when the value of ν may vary at each iteration.

Let $I_{i,C^i_{\beta,\nu_1^i}}(x) = [l_i(\nu_1^i), r_i(\nu_1^i))$, $i \geq 1$ be the ith interval by the Rényi ("cautious") map $C^i_{\beta,\nu_1^i}(x)\,(1 \leq \nu_i \leq (\beta-1)^{-1})$, recursively defined by

$$\begin{aligned} l_i(\nu_1^i) &= l_{i-1}(\nu_1^{i-1}) + b_{i,C^i_{\beta,\nu_1^i}}\gamma^i, \\ r_i(\nu_1^i) &= r_{i-1}(\nu_1^{i-1}) - \overline{b}_{i,C^i_{\beta,\nu_1^i}}\gamma^i \end{aligned} \tag{61}$$

together with the initial interval $I_{0,C_{\beta,\nu}}(x) = [l_0, r_0)$ with $l_0 = 0$ and $r_0 = (\beta-1)^{-1}$. This yields the relations

$$\begin{aligned} l_i(\nu_1^i) &= \sum_{j=1}^{i} b_{j,C^j_{\beta,\nu_1^j}}\gamma^j, \\ r_i(\nu_1^i) &= (\beta-1)^{-1} - \sum_{j=1}^{i} \overline{b}_{j,C^j_{\beta,\nu_1^j}}\gamma^j. \end{aligned} \tag{62}$$

Using the two trivial relations $(\beta-1)^{-1} = \sum_{j=1}^{\infty}\gamma^j$, $(\beta-1)^{-1} - \sum_{j=1}^{i}\gamma^j = \sum_{j=i+1}^{\infty}\gamma^j = (\beta-1)^{-1}\gamma^i$ and we can rewrite $r_i(\nu_1^i)$ as

$$r_i(\nu_1^i) = l_i(\nu_1^i) + \sum_{j=i+1}^{\infty}\gamma^j = l_i(\nu_1^i) + (\beta-1)^{-1}\gamma^i. \tag{63}$$

Then, we obtain the useful relation

$$\frac{|I_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}(x)|}{|I_{i,C^i_{\beta\nu_1^i}}(x)|} = \gamma, \tag{64}$$

where $|I|$ denotes the width of an interval I. Figures 6(a) and (b) show two examples of the interval contraction process by β-expansion, where the subinterval is marked with a scale that indicates several numbers and a renormalization rule is devised which is guaranteed by the onto-mapping $C_{\beta,\nu}(x)$. Furthermore, this yields the following important lemma.

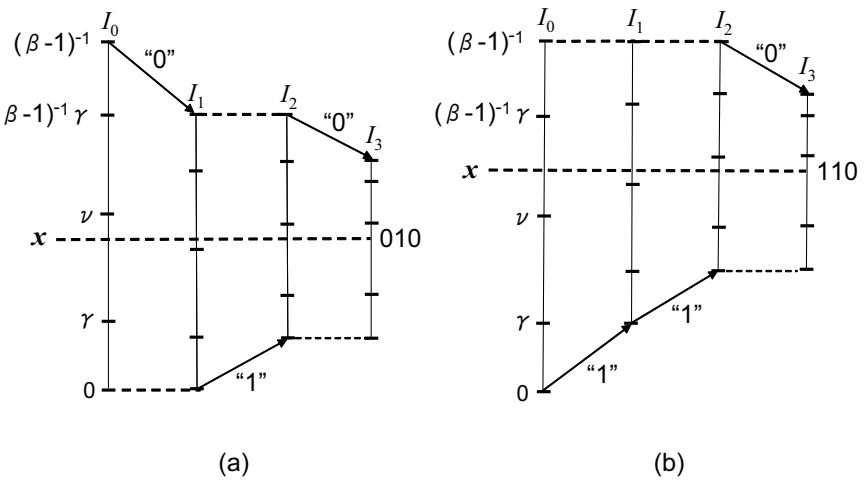

Fig. 6. Representation of the β-expansion process: the vertical bar with a scale represents the subinterval $I_i(\cdot)$ at the ith stage, where $I_0 = [0, (\beta-1)^{-1})$ is the initial interval. A succession of three binary decisions using the quantiser $Q^f_\nu(\cdot)$ gives two binary expansions of the sample x:(a) 010 and (b) 110, each of which depends on ν. The widths of the subintervals are contracted by γ and renormalized.

Lemma 2:*If $x \in I_{i,C^i_{\beta,\nu_1^i}}(x)$, then $x \in I_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}(x)$, $i \in \mathbb{Z}$. That is, x is always confined to the ith subinterval where the binary digits of the β-expansion of x are obtained.*

proof: It is obvious that $x \in I_{0,C_{\beta,\nu}}(x) = [0, (\beta-1)^{-1})$ because $x \in [0,1) \subset I_{0,C_{\beta,\nu}}(x)$. Suppose that $x \in I_{i,C^i_{\beta,\nu_1^i}}(x)$, $i \geq 1$.

$$\begin{aligned} x - l_{i+1}(\nu_1^{i+1}) &= \sum_{j=1}^{i} b_{j,C^j_{\beta,\nu_1^j}}\gamma^j + \gamma^i C^i_{\beta,\nu_1^i}(x) \\ &- \{l_i(\nu_1^i) + b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}\gamma^{i+1}\} = \gamma^i\{C^i_{\beta,\nu_1^i}(x) - \gamma b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}\}, \end{aligned}$$

which implies that if $C^i_{\beta,\nu_1^i}(x) < \gamma\nu_{i+1}$, *i.e.*, $b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}} = 0$, then $x - l_{i+1}(\nu_1^{i+1}) = \gamma^i C^i_{\beta,\nu_1^i}(x) \geq 0$. Otherwise, *i.e.*, if $C^i_{\beta,\nu_1^i}(x) \geq \gamma\nu_{i+1}$, $b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}} = 1$, then $x - l_{i+1}(\nu_1^{i+1}) \geq \gamma^{i+1}(\nu_{i+1} - 1) \geq 0$ since $1 \leq \nu_{i+1}$. On the other hand,

$$\begin{aligned} & r_{i+1}(\nu_1^{i+1}) - x \\ &= (\beta-1)^{-1} - \sum_{j=1}^{i+1}\overline{b}_{j,C^j_{\beta,\nu_1^j}}\gamma^j - \{\sum_{j=1}^{i} b_{j,C^j_{\beta,\nu_1^j}}\gamma^j + \gamma^i C^i_{\beta,\nu_1^i}(x)\} \\ &= \sum_{j=1}^{\infty}\gamma^j - \sum_{j=1}^{i+1}\gamma^j + b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}\gamma^{i+1} - \gamma^i C^i_{\beta,\nu_1^i}(x) \\ &= \gamma^{i+1}\{(\beta-1)^{-1} + b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}} - \beta C^i_{\beta,\nu_1^i}(x)\}, \end{aligned}$$

which implies that if $C^i_{\beta,\nu_1^i}(x) < \gamma\nu_{i+1}$, *i.e.*, $b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}} = 0$, then $r_{i+1}(\nu_1^{i+1}) - x = \gamma^{i+1}\{(\beta-1)^{-1} - \beta C^i_{\beta,\nu_1^i}(x)\} \geq \gamma^{i+1}\{(\beta-1)^{-1} - \nu_{i+1}\} \geq 0$ because $\nu_{i+1} \leq (\beta-1)^{-1}$. Otherwise, *i.e.*, if $C^i_{\beta,\nu_1^i}(x) \geq \gamma\nu_{i+1}$, $b_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}} = 1$, then $r_{i+1}(\nu_1^{i+1}) - x = \gamma^{i+1}\{(\beta-1)^{-1} + 1 - \beta C^i_{\beta,\nu_1^i}(x)\} \geq 0$ since $C^i_{\beta,\nu_1^i}(x) \leq (\beta-1)^{-1}$. This implies that $x \in I_{i+1,C^{i+1}_{\beta,\nu_1^{i+1}}}(x)$. This completes the proof. $\square$

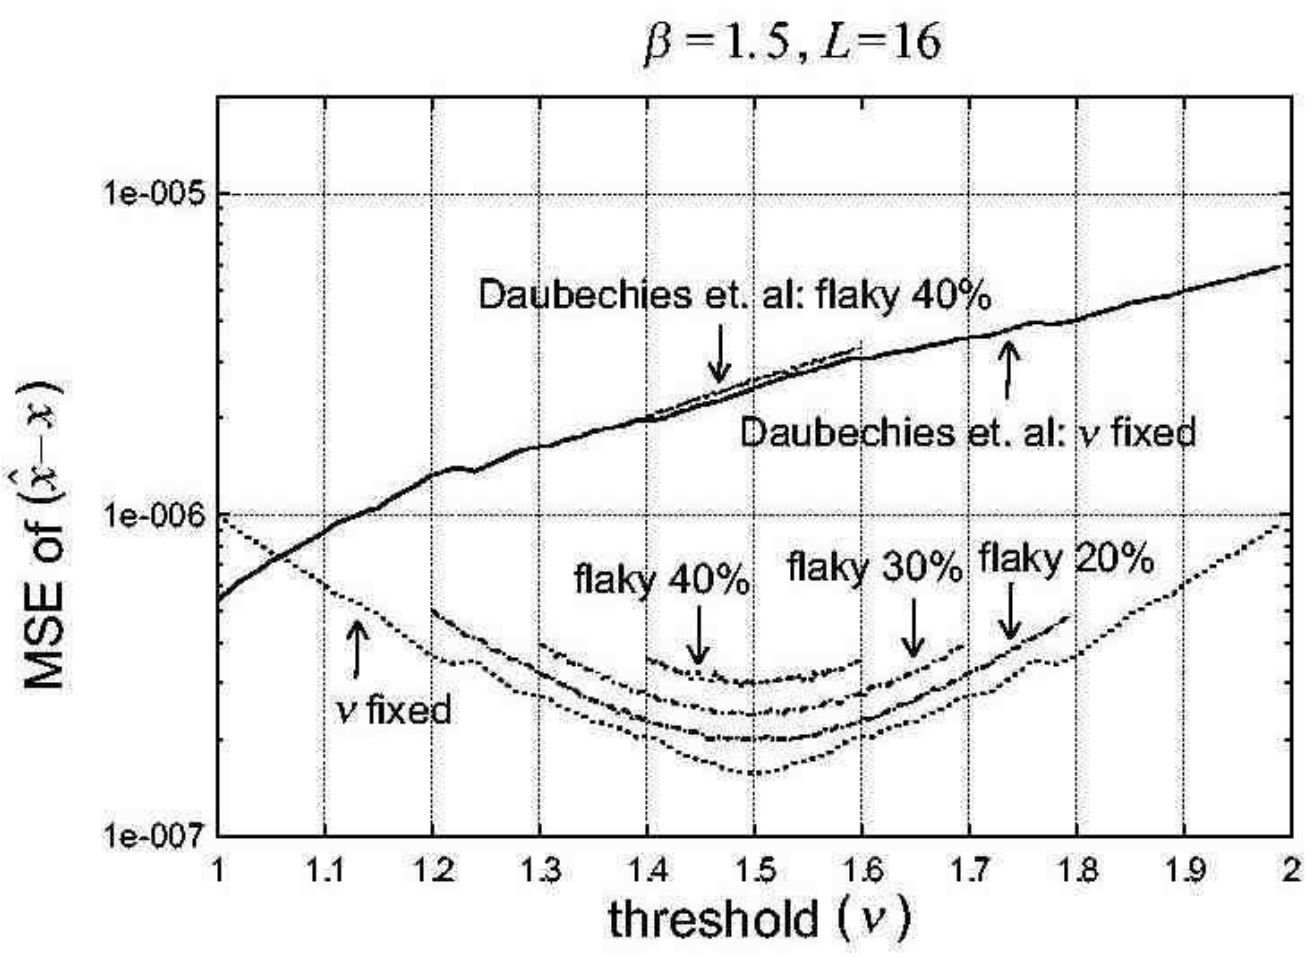

Fig. 7. The MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma, p_L)$), $p_L \in \{0,1\}$ using the exact β of the β-encoder with $\beta = 1.5$, $L = 16$, and fluctuating ν_i, $1 \leq i \leq L$ with its several fluctuation bounds $0, 10, 20, 30, 40\%$.

Thus, we have obtained Eq.(35). We differentiate between the choices of fixed ν^*, *e.g.*, the greedy/lazy and cautious expansions and the decoded methods of a sample x. However, the roles of "0" and "1" should be equal in the binary expansion of a sample x. Theorem 1 supports this simple intuition which is an elementary result but is a fundamental point for this study. Furthermore, Lemma 2 readily leads us to a *good* decoded value of x, *i.e.*, the *"midpoint of the Lth stage subinterval* $I_{L,C^L_{\beta,\nu_1^L}}(x)$ *with* $\nu_i \in [1,(\beta-1)^{-1}]$, $1 \le i \le L$", denoted by $\widehat{x}(\gamma,1)$, and defined by

$$\widehat{x}(\gamma,1) = \sum_{i=1}^{L} b_{i,C_{\beta,\nu_1^i}}\gamma^i + \frac{\gamma^L(\beta-1)^{-1}}{2}. \qquad (65)$$

This works in favour of the cautious expansion with its *strongly invariant subinterval of the locally eventually onto-(cautious expansion) map* $C^L_{\beta,\nu^*}(x)$, $I^{\text{invariant}}_{L,C^L_{\beta,\nu^*}}(x)$.

Hence we readily obtain the following important theorem:

Theorem 2 [28]: *If we introduce different decoded values of x, depending on the representative point in the Lth subinterval, denoted by the index p_L as follows:*

$$\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L) = \begin{cases} l_L(\nu_1^L), & \text{if } p_L = 0,\\ \dfrac{l_L(\nu_1^L)+r_L(\nu_1^L)}{2}, & \text{if } p_L = 1,\\ r_L(\nu_1^L), & \text{if } p_L = 2, \end{cases} \qquad (66)$$

then at L-bit precision, the approximation error between the original value x and its decoded value $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$ is bounded by

$$|x - \widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)| \le \frac{(1+|p_L-1|)}{2}\cdot(\beta-1)^{-1}\gamma^L. \quad (67)$$

Proof: Since $x \in [l_L(\nu_1^L), r_L(\nu_1^L)]$, the approximation error is bounded by

$$|x - \widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)| \le \begin{cases} (\beta-1)^{-1}\gamma^L, & \text{if } p_L = 0 \text{ or } 2,\\ \frac{(\beta-1)^{-1}\gamma^L}{2}, & \text{if } p_L = 1. \end{cases} \qquad (68)$$

This concludes the proof. □

Remark 2: Theorem 2 demonstrates that the decoded value of x using $\{b_{i,C^i_{\beta,\nu_1^i}}\}_{i=1}^L$ should be defined by $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$. On the other hand, $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,0)$ is identical to the decoded value of Daubechies *et al.* Namely, $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$ improves the quantisation error by 3dB over the Daubechies *et al.*'s bound $\nu\gamma^L$ [13] when $\beta > 1.5$ since

$$|x - \widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)| \le \frac{(\beta-1)^{-1}\gamma^L}{2} < \gamma^L \le \nu\gamma^L. \quad (69)$$

These observations are clearly confirmed in several numerical results of the mean square error (MSE) of $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$ using β as shown in Fig.5 and those of estimated $\widehat{\beta}$ as shown below in Fig.8 as well as those of $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},1)$ using estimated $\widehat{\beta}$ in Fig.9. Figure 5 shows the MSE of quantisations by decoded $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$, $0 \le p_L \le 2$ using the value $\beta = 1.5$ of the β-encoder with $L = 16$ for fixed $\nu^* \in [1,(\beta-1)^{-1}]$. It is clear that the MSE of the decoded $\widehat{x}_{L,C^L_{\beta,\nu^*}}$ by the *cautious* expansion is smaller than those of the *greedy* and *lazy* expansions because of their invariant subintervals (see Fig.17(a)).

In all of the numerical simulations as discussed below, we average over $10,000$ samples x, which are assumed to be uniformly and independently distributed over $[0,1]$ for 100 thresholds $\nu^* \in [1,(\beta-1)^{-1}]$ with its associated fluctuating thresholds ν_i, $1 \le i \le L$ based on the fluctuations u_i, *i.e.*, $\nu_i = \nu^*(1+u_i)$ where u_i is an independent random variable with bound $\varepsilon \in \{0, 0.2, 0.3, 0.4\}$. We introduce the mean squared error (MSE) of the decoded $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}$, defined as

$$\mathrm{MSE}(\widehat{x}_{L,C^L_{\beta,\nu_1^L}}) = \int_0^1 (x - \widehat{x}_{L,C^L_{\beta,\nu_1^L}})^2 dx. \qquad (70)$$

Figure 7 shows the $\mathrm{MSE}(\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)), p_L \in \{0,1\}$ using the value of β for the fluctuating ν_i, $1 \le i \le L$ with its several fluctuation bounds.

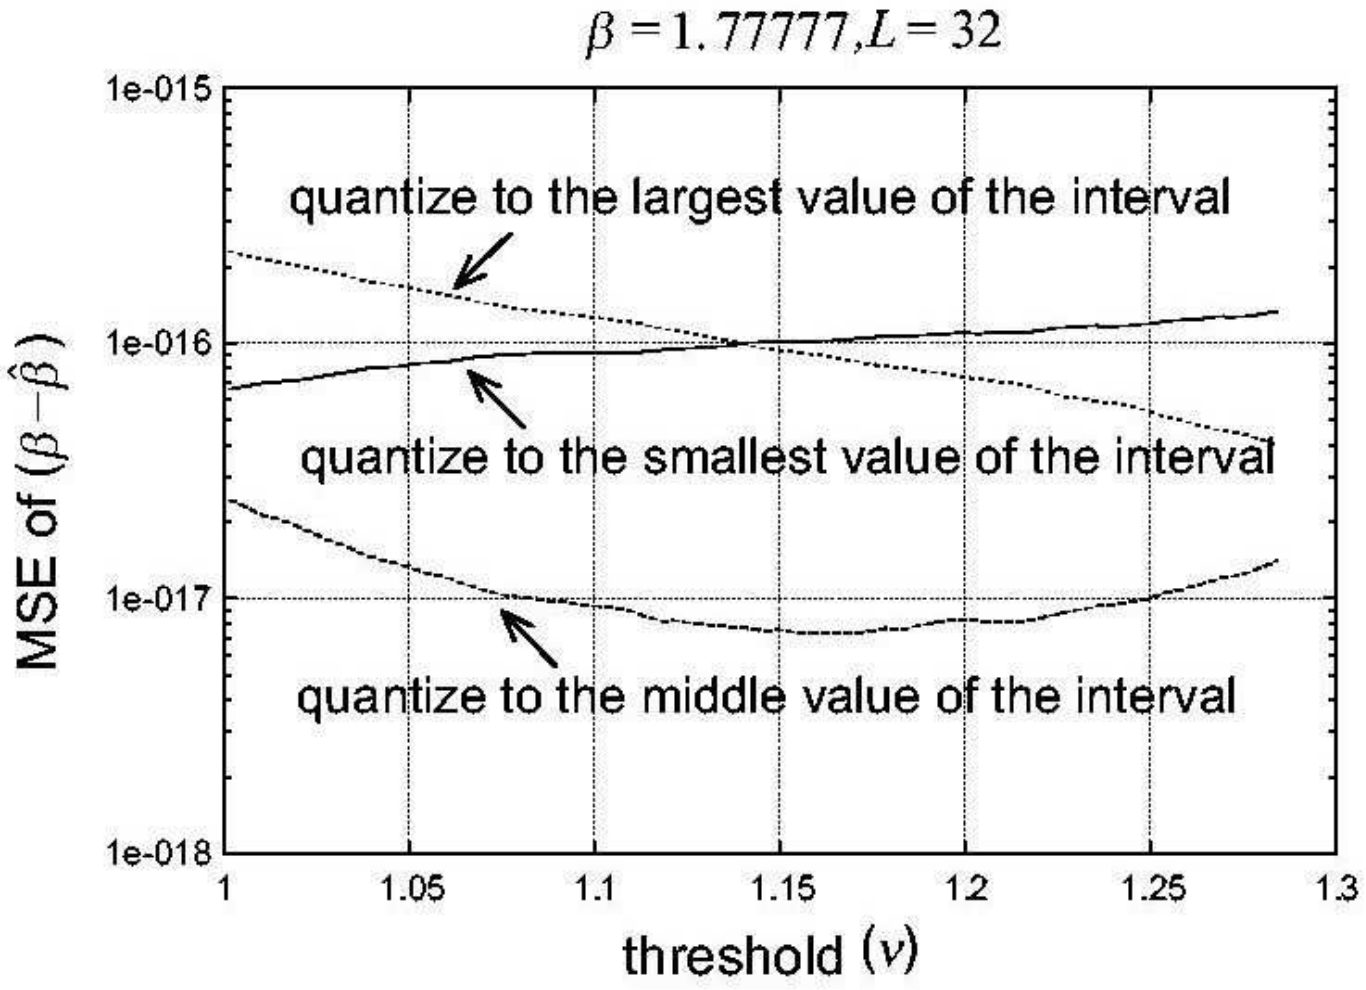

Fig. 8. The MSE of the estimated β, *i.e.*, $\widehat{\beta}_{L,C^L_{\beta,\nu^*}}(\widehat{x},0)$, $\widehat{\beta}_{L,C^L_{\beta,\nu^*}}(\widehat{x},1)$, and $\widehat{\beta}_{L,C^L_{\beta,\nu^*}}(\widehat{x},2)$ of the β-encoder with $\beta = 1.77777$, $L = 32$, and fixed $\nu^* \in [1,(\beta-1)^{-1}]$.

V. CHARACTERISTIC EQUATIONS FOR β

In order to show the self-correction property of the amplification factor β, Daubechies *et al.* [15] gave an equation for β governed by the bit sequences of the sample data as follows. Using the β-expansion sequences $b_{i,C^i_{\beta,\nu_1^i}}$ for $x \in [0,1)$ and $c_{i,C^i_{\beta,\nu_1^i}}$ for $y = 1-x$ $(i = 1,2,\cdots,L)$ yields a root of the *characteristic equation of* β, defined by

$$P^{\text{Daubechies et al.}}_{L,C^L_{\beta,\nu_1^L}}(\gamma) = 1 - \sum_{i=1}^{L}(b_{i,C^i_{\beta,\nu_1^i}} + c_{i,C^i_{\beta,\nu_1^i}})\gamma^i, \qquad (71)$$

as the estimated γ. In order to apply Daubechies *et al.*'s idea for estimating β, let us introduce cautious expansions $\{b_{i,C^i_{\beta,\nu_1^i}}\}_{i=1}^L$ for x and $\{c_{i,C^i_{\beta,\nu_1^i}}\}_{i=1}^L$ for $y = 1-x$. Let us use

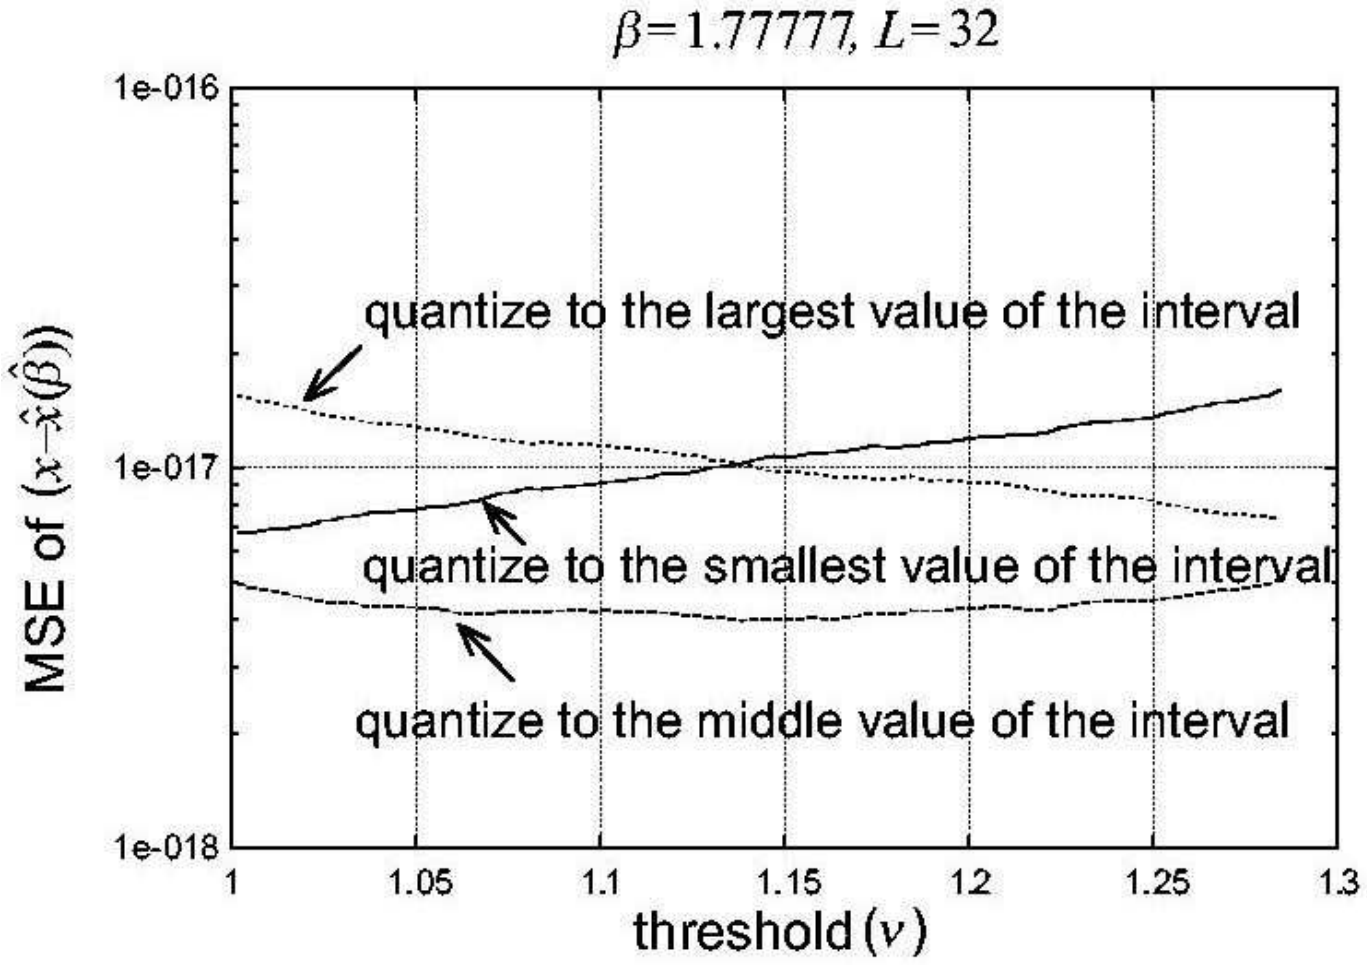

Fig. 9. The MSE of quantisations by decoded $\widehat{x}_{L,C^L_{\beta,\nu^*}}(\widehat{\gamma},0)$, $\widehat{x}_{L,C^L_{\beta,\nu^*}}(\widehat{\gamma},1)$ and $\widehat{x}_{L,C^L_{\beta,\nu^*}}(\widehat{\gamma},2)$ using the estimated $\widehat{\beta}$ of the β-encoder with $\beta = 1.77777$, $L = 32$, and fixed $\nu^* \in [1, (\beta-1)^{-1}]$.

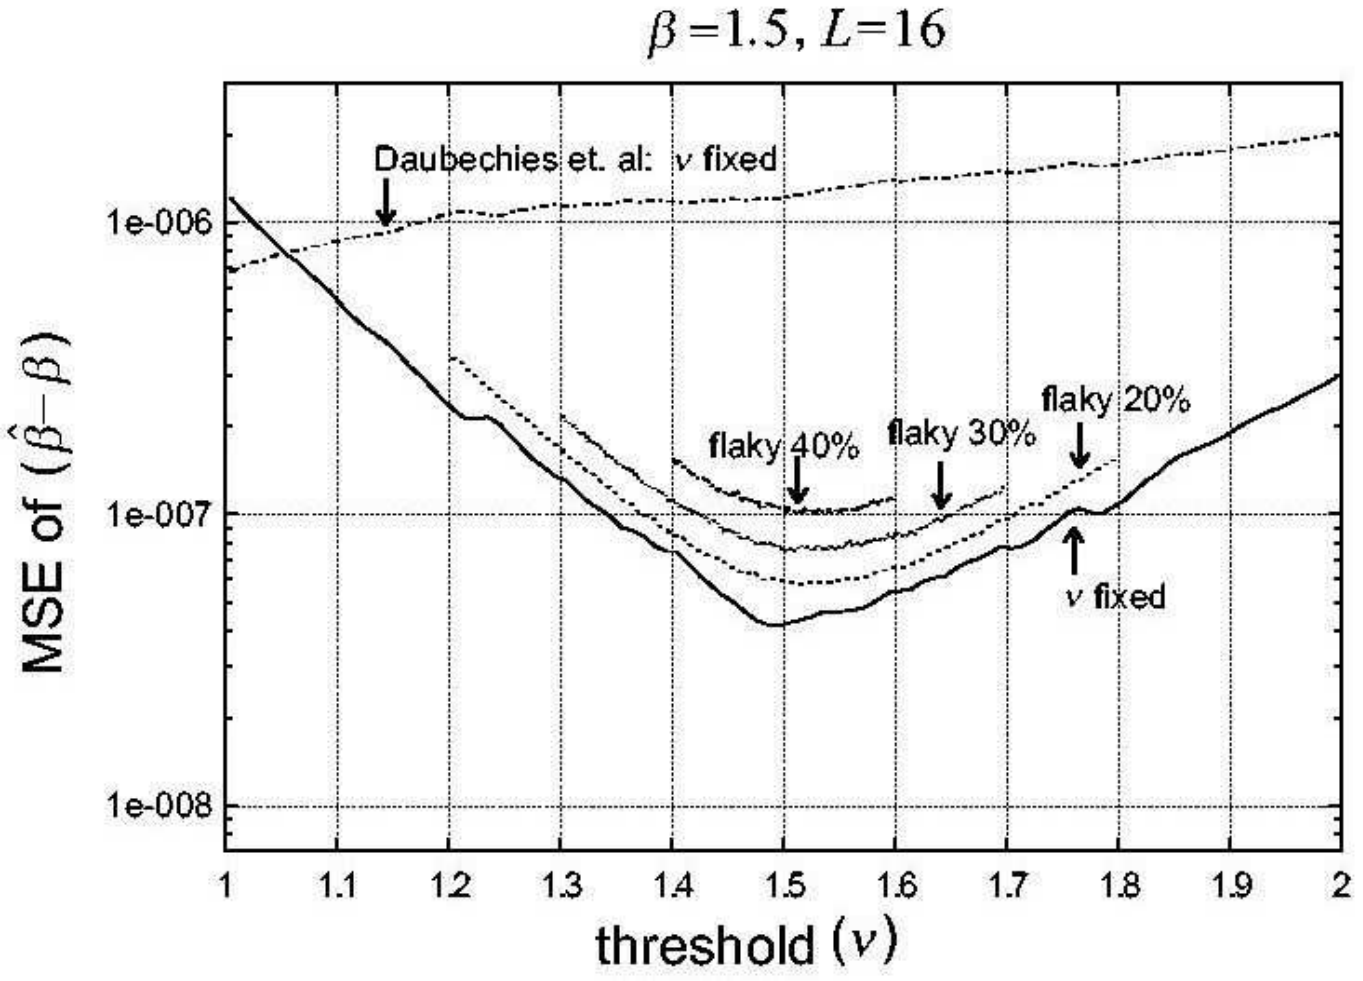

Fig. 10. The MSE of the estimated β, *i.e.*, $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$ and $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\gamma,0)$ of the β-encoder with $\beta = 1.5$, $L = 16$, and fluctuating ν_i, $1 \le i \le L$ with its fluctuation bounds $0, 20, 30, 40\%$.

Eq.(66) to define the decoded values, respectively as follows:

$$\begin{aligned}\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L) &= \sum_{i=1}^{L} b_{i,C^i_{\beta,\nu_1^i}}\gamma^i + p_L\cdot\frac{\gamma^{L+1}}{2(1-\gamma)},\\ \widehat{y}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L) &= \sum_{i=1}^{L} c_{i,C^i_{\beta,\nu_1^i}}\gamma^i + p_L\cdot\frac{\gamma^{L+1}}{2(1-\gamma)}.\end{aligned} \tag{72}$$

Then we get the relation

$$\begin{aligned}&\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L) + \widehat{y}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)\\ &= \sum_{i=1}^{L}\left(b_{i,C^i_{\beta,\nu_1^L}} + c_{i,C^i_{\beta,\nu_1^L}}\right)\gamma^i + p_L\cdot\frac{\gamma^{L+1}}{1-\gamma} \simeq 1\end{aligned} \tag{73}$$

which gives a new characteristic equation for β:

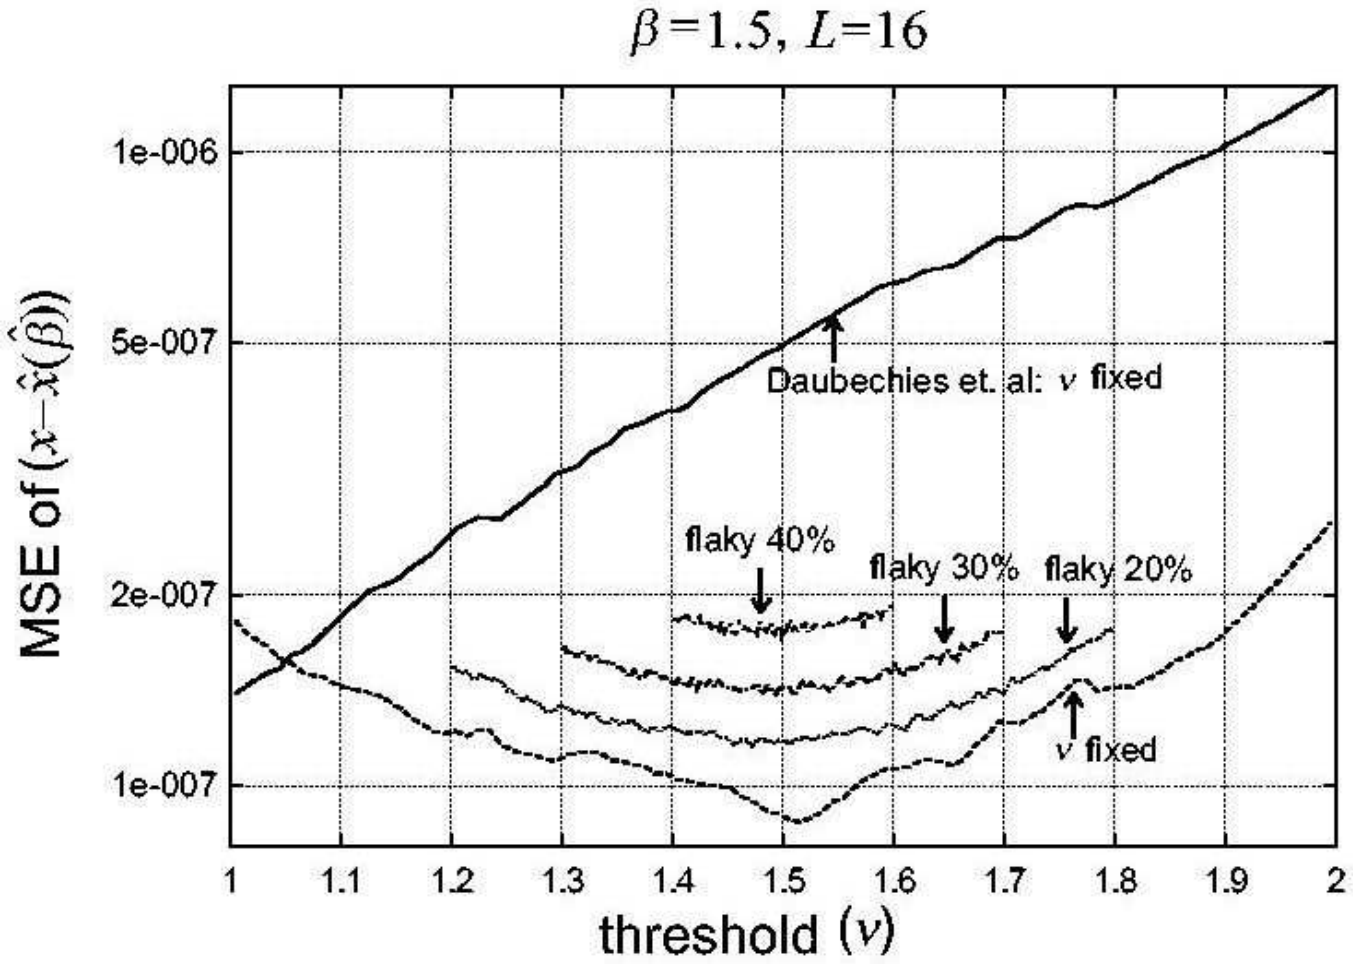

Fig. 11. The MSE of quantisations by decoded $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},0)$ and $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},1)$ using the estimated β *i.e.*, $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\gamma,0)$ and $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$ of the β-encoder with $\beta = 1.5$, $L = 16$, and fluctuating ν_i, $1 \le i \le L$ with its fluctuation bounds $0, 20, 30, 40\%$.

Theorem 3 [28]:*The estimated value of γ is a root of the polynomial $P_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$, defined by*

$$P_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L) = 1 - \sum_{i=1}^{L}(b_{i,C^i_{\beta,\nu_1^i}} + c_{i,C^i_{\beta,\nu_1^i}})\gamma^i - p_L\cdot\frac{\gamma^{L+1}}{1-\gamma}. \tag{74}$$

The uniqueness of such a root of the continuous function $P_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$ over the interval $[0,1]$ is guaranteed by the intermediate value theorem since $\dfrac{d\,P_{L,C_{\beta,\nu_1^L}}(\gamma,p_L)}{d\gamma} < 0$. Let $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\widehat{x})$ be the root of $P_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$ as a function of the sample x, which is uniformly and independently distributed over $[0,1]$. We introduce the MSE of the estimated $\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}$, defined as

$$\mathrm{MSE}(\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\widehat{x})) = \int_0^1 (\beta - \widehat{\beta}_{L,C^L_{\beta,\nu_1^L}})^2 dx. \tag{75}$$

Remark 3: Daubechies *et al.*'s characteristic equation of β, Eq.(71) [15], *i.e.*, $P^{\textit{Daubechies et al.}}_{L,C^L_{\beta,\nu_1^L}}(\gamma,0)$ has no term $\gamma^{L+1}(1-\gamma)^{-1}$ that can be written as the sum of two terms $\gamma^{L+1}[2(1-\gamma)]^{-1}$ of the decoded values $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}$ and $\widehat{y}_{L,C^L_{\beta,\nu_1^L}}$, which come from $\gamma^L C^L_{\beta,\nu_1^L}(x)$ and $\gamma^L C^L_{\beta,\nu_1^L}(1-x)$, respectively. However, this missing term $\gamma^{L+1}[2(1-\gamma)]^{-1}$ plays an important role in estimating both β and x precisely, as shown below. Thus, this term should not be removed because information will be lost. This is one of the main differences between Daubechies *et al.*'s DA conversion in the β-encoder and ours defined here.

Remark 4: In a decoding process, knowing the exact value of a fixed $\nu^* \in [1, (\beta-1)^{-1})$ is unnecessary. If one wants to know the estimated ν^*, it is given by

$$\widehat{\nu}^*_{L,C^L_{\beta,\nu^*}}(\gamma,1)=\sum_{i=1}^{L}\overline{b}_{i,C^i_{\beta,\nu^*}}\gamma^i+\frac{(\beta-1)^{-1}\gamma^L}{2}, \qquad (76)$$

which comes from exchanging the roles of x and ν.

Figures 8 and 9 show the MSE($\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\widehat{x},p_L)$) and MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},p_L)$), respectively, for $0\le p_L\le 2$, using the estimated $\widehat{\beta}$ of the β-encoder for fixed ν^*. Comparing Fig.5 with Fig.9 leads us to observe that $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},p_L)$ gives a better approximation to x than $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$ in terms of the MSE performance. Figures 10 and 11 show the MSE($\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\widehat{x},p_L)$) and MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},p_L)$), respectively, with $p_L\in\{0,1\}$ using the estimated $\widehat{\beta}$ of the β-encoder with fluctuating ν_i, $1\le i\le L$ with its several fluctuation bounds. As shown in Figs. 7 and 11, $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},p_L)$, $p_L\in\{0,1\}$ also gives a better approximation to x than $\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,p_L)$ even in the case of fluctuating ν_i.

VI. OPTIMAL DESIGN OF AN AMPLIFIER WITH A SCALE-ADJUSTED MAP

In β-encoders, for a given quantiser tolerance $\sigma\le(\beta-1)^{-1}-1$, we must choose appropriate values for the quantiser threshold ν and the amplifier parameter β. The scale of the map depends solely on β which determines the MSE of the quantisation. This motivates us to introduce a new map, called a *scale-adjusted map*, with a scale $s>0$ independent of β, defined by

$$S_{\beta,\nu,s}(x)=\begin{cases}\beta x, & x\in[0,\gamma\nu),\\ \beta x-s(\beta-1), & x\in[\gamma\nu,s),\end{cases}\quad \nu\in[s(\beta-1),s), \qquad (77)$$

which is illustrated in Fig. 12. This is identical to the β-map when $s=(\beta-1)^{-1}$. Let $b_{i,S^i_{\beta,\nu_1^i,s}}$ be the associated bit sequence for the threshold sequence ν_1^L, defined by

$$b_{i,S^i_{\beta,\nu_1^i,s}}=\begin{cases}0, & S^{i-1}_{\beta,\nu_1^{i-1},s}(x)\in[0,\gamma\nu_i),\\ 1, & S^{i-1}_{\beta,\nu_1^{i-1},s}(x)\in[\gamma\nu_i,s).\end{cases} \qquad (78)$$

The scale-adjusted map $S_{\beta,\nu,s}(x)$ also determines the flaky quantiser $Q^f_{[s(1-\gamma),s\gamma]}(\cdot)$. The invariant subinterval of $S_{\beta,\nu,s}(x)$, defined as $[\nu-s(\beta-1),s\nu)$ is similar to that of the β-expansions. Let $\{b_{i,S^i_{\beta,\nu_1^i,s}}\}_{i=1}^L$ be the sequence generated by iterating the map $S_{\beta,\nu,s}(x)$ of $x\in[0,s)$ L times, denoted by $S^L_{\beta,\nu_1^L,s}(x)$. Then we get

$$\begin{aligned}S^L_{\beta,\nu_1^L,s}(x) &= \beta S^{L-1}_{\beta,\nu_1^{L-1},s}(x)-s(\beta-1)b_{L,S_{\beta,\nu_1^L,s}}\\ &= \beta^L x-s(\beta-1)\sum_{i=1}^{L}b_{i,S_{\beta,\nu_1^i,s}}\beta^{L-i}, \qquad (79)\end{aligned}$$

or

$$x=s(\beta-1)\sum_{i=1}^{L}b_{i,S^i_{\beta,\nu_1^i,s}}\gamma^i+\gamma^L S^L_{\beta,\nu_1^L,s}(x). \qquad (80)$$

Using the relation $S^L_{\beta,\nu_1^L,s}(x)\in[0,s)$ gives its subinterval, defined by

$$\begin{aligned}&I_{L,S^L_{\beta,\nu_1^L,s}}(x)\\ &=s(\beta-1)[\sum_{i=1}^{L}b_{i,S^i_{\beta,\nu_1^i,s}}\gamma^i,\sum_{i=1}^{L}b_{i,S^i_{\beta,\nu_1^i,s}}\gamma^i+\frac{\gamma^{L+1}}{1-\gamma}) \qquad (81)\end{aligned}$$

which enables us to easily obtain the decoded value $\widehat{x}_{L,S^L_{\beta,\nu_1^L,s}}$ as follows:

$$\widehat{x}_{L,S^L_{\beta,\nu_1^L,s}}=s(\beta-1)\sum_{i=1}^{L}b_{i,S^i_{\beta,\nu_1^i,s}}\gamma^i+\frac{s\gamma^L}{2} \qquad (82)$$

and its quantisation error bound as

$$\epsilon_{L,S_{\beta,\nu_1^L,s}}(x)=|x-\widehat{x}_{L,S^L_{\beta,\nu_1^L,s}}|\le\frac{s\gamma^L}{2}. \qquad (83)$$

We introduce an A/D converter, called a *scale-adjusted* β-*encoder*, that realizes the above expansion, as shown in Fig. 13, where the scale s of $S_{\beta,\nu,s}$ can be adjusted with the bit-controlled constant-current source of the quantiser $s(b)$, defined by

$$s(b)=\begin{cases}0, & b=0,\\ s, & b=1.\end{cases} \qquad (84)$$

Its robustness to the fluctuation of the quantiser threshold ν is restricted by its tolerance $\sigma_{\beta,s}$:

$$\sigma_{\beta,s}=s-s(\beta-1)=s(2-\beta). \qquad (85)$$

Even if the amplification factor β is constant, the tolerance $\sigma_{\beta,s}$ can be set arbitrarily by selecting the constant-voltage source s. We get the following convenient lemma as a rule of thumb for AD/DA-converter designs.

Lemma 3: *In a scale adjusted β-encoder, for a given bit budget L and quantiser tolerance $\sigma_{\beta,s}$, the amplification factor β with its inevitable fluctuation, should be set to*

$$\beta=\frac{2L}{L+1}. \qquad (86)$$

in order to minimize the quantisation error.

proof: Eq.(81) gives $|I_{L,S^L_{\beta,\nu,s}}(x)|=s\beta^{-L}=\dfrac{\sigma_{\beta,s}\beta^{-L}}{(2-\beta)}$. Differentiating $|I_{L,S^L_{\beta,\nu,s}}(x)|$ with respect to β, we obtain

$$\frac{d|I_{L,S^L_{\beta,\nu,s}}(x)|}{d\beta}=\frac{\sigma_{\beta,s}\beta^{-L-1}}{(2-\beta)^2}\{\beta-L(2-\beta)\}. \qquad (87)$$

This completes the proof. □

This lemma shows that the amplification factor β minimizing the quantisation error is not equal to 2 but the relation $\beta=2$ as in PCM holds only as $L\to\infty$. However, we must take a little care at this point. Assume that for a given initial value of an A/D converter $x\in[0,1)$, the scale $s=\sigma_{\beta,s}(L+1)/2>1$. In this case, we should adjust the amplification factor and the constant-voltage source which satisfy $\beta=2L/(L+1)$ and $s=\sigma_{\beta,s}(L+1)/2$, respectively; otherwise we should adjust these parameters such as $s=1$ and $\beta=2-\dfrac{s}{\sigma_{\beta,s}}=2-\sigma_{\beta,s}^{-1}$.

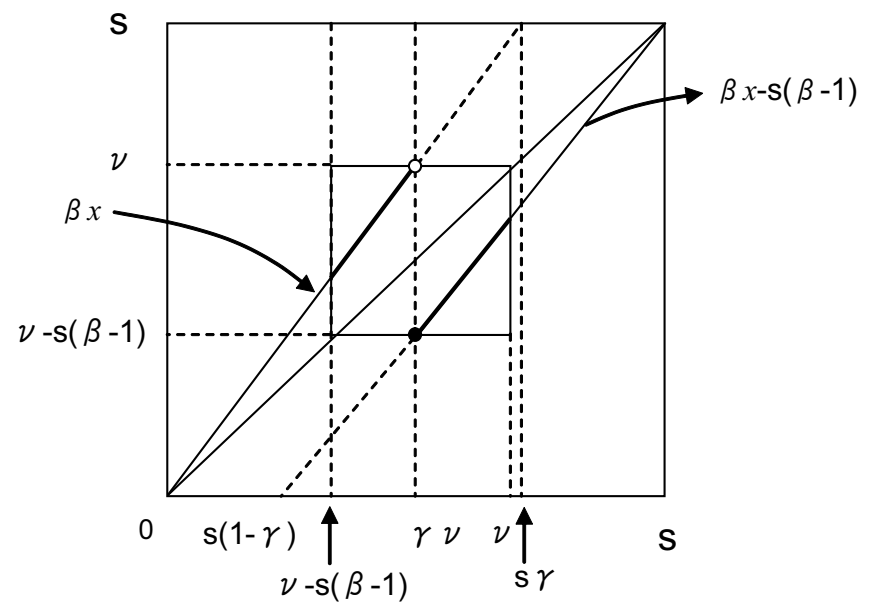

Fig. 12. The scale-adjusted β-map $S_{\beta,\nu,s}(x)$ with its invariant subinterval $[\nu - s(\beta-1), \nu)$.

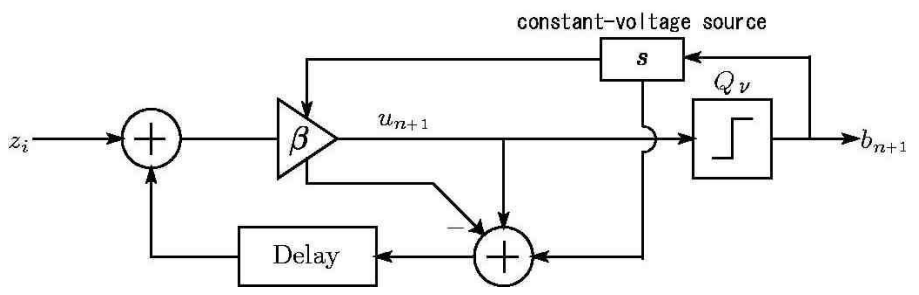

Fig. 13. The scale-adjusted β-encoder, where $s = s(b)$ is defined by Eq.(84).

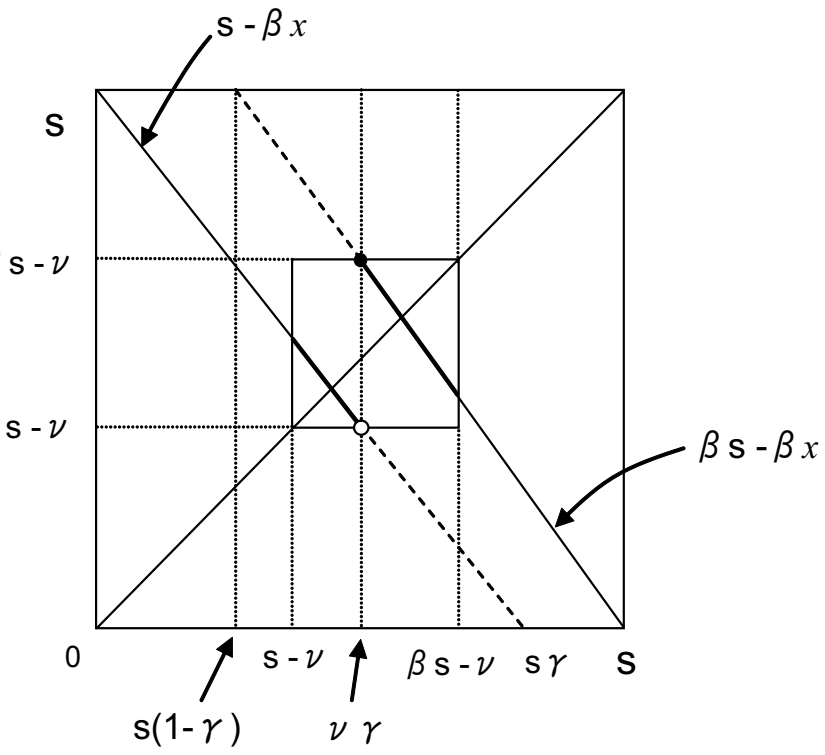

Fig. 14. The map of the negative β-expansion:$R_{\beta,\nu,s}(x)$. Its invariant subinterval is a function of ν (see Figs. 16(a),(b),(c) and 17(b)).

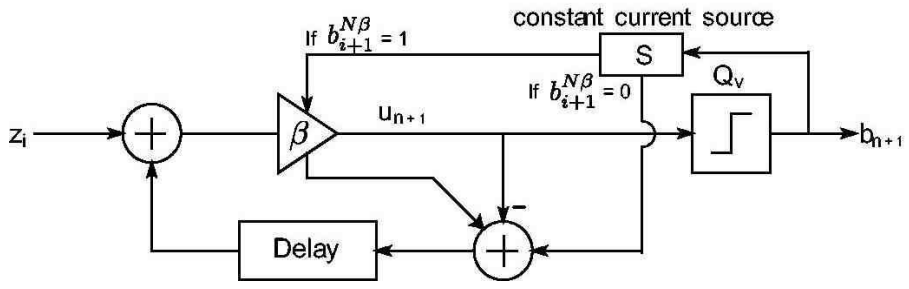

Fig. 15. The negative β-encoder.

VII. NEGATIVE β-ENCODER

This section introduces a radix expansion of a real number in a negative real base, called a *negative β-expansion*, and discusses differences between the quantisation errors of negative β-expansions and those of (scale-adjusted) β-expansions as well as their MSE. Such a negative radix expansion is unusual, and somewhat intricate. First, consider a (scale-adjusted) negative β-expansion as a map $R_{\beta,\nu,s}(x) : [0, s) \to [0, s),\ s > 0$, defined by

$$R_{\beta,\nu,s}(x) = \begin{cases} s - \beta x, & x \in [0, \gamma\nu), \\ \beta s - \beta x, & x \in [\gamma\nu, s), \end{cases} \quad \nu \in [s(\beta-1), s] \tag{88}$$

as shown in Fig. 14. Such a negative β-expansion defines a new A/D converter as shown in Fig.15, called a *negative β-encoder* which facilitates the implementation of stable analog circuits [5] and improves the quantisation MSE both in the greedy case $\nu = s(\beta-1)$ and in the lazy case $\nu = s$ as follows. Let $b_{i,R^i_{\beta,\nu^i_1,s}}(x)$ be the associated bit sequence for the threshold sequence ν_1^L, defined as

$$b_{i,R^i_{\beta,\nu^i_1,s}}(x) = \begin{cases} 0, & R^{i-1}_{\beta,\nu_1^{i-1},s}(x) \in [0, \gamma\nu_i), \\ 1, & R^{i-1}_{\beta,\nu_1^{i-1},s}(x) \in [\gamma\nu_i, s), \end{cases} \tag{89}$$

where $R^i_{\beta,\nu_1^i,s}(x)$ is defined recursively as

$$\begin{aligned} R^L_{\beta,\nu_1^L}(x) &= R_{\beta,\nu_L}(R^{L-1}_{\beta,\nu_1^{L-1}}(x)) \\ &= R_{\beta,\nu_L}(R_{\beta,\nu_{L-1}}(R^{L-2}_{\beta,\nu_1^{L-2}}(\cdots(R_{\beta,\nu_1}(x))). \end{aligned} \tag{90}$$

The scale-adjusted negative β map $R_{\beta,\nu,s}(x)$ also defines the flaky quantiser $Q^f_{[s(1-\gamma),s\gamma]}(\cdot)$. Then $R^L_{\beta,\nu_1^L,s}(x)$ can be represented recursively as follows:

$$\begin{aligned} R^L_{\beta,\nu,s}(x) &= s f_{L,R^L_{\beta,\nu_1^L,s}} - \beta R^{L-1}_{\beta,\nu_1^{L-1},s}(x) \\ &= s f_{L,R^L_{\beta,\nu_1^L,s}} - \beta s f_{L-1,R^{L-1}_{\beta,\nu_1^{L-1},s}} \\ &+ \cdots + (-\beta)^{L-1} s f_{1,R_{\beta,\nu_1^1,s}} + (-\beta)^L x \\ &= s \sum_{i=1}^{L} f_{i,R^i_{\beta,\nu_1^i,s}} (-\beta)^{L-i} + (-\beta)^L x \end{aligned} \tag{91}$$

which yields

$$x = (-\gamma)^L R^L_{\beta,\nu_1^L,s}(x) - s \sum_{i=1}^{L} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i, \tag{92}$$

where

$$f_{i,R^i_{\beta,\nu_1^i,s}} = 1 + b_{i,R^i_{\beta,\nu_1^i,s}} (\beta - 1). \tag{93}$$

The relation $R^L_{\beta,\nu_1^L,s}(x) \in [0, s)$ defines its subinterval,

$$\begin{aligned} &I_{2L+1,R^{2L+1}_{\beta,\nu_1^{2L+1},s}}(x) \\ &= s[-\gamma^{2L+1} - \sum_{i=1}^{2L+1} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i, - \sum_{i=1}^{2L+1} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i) \end{aligned} \tag{94}$$

$$\begin{aligned} &I_{2L,R^{2L}_{\beta,\nu_1^{2L},s}}(x) \\ &= s[-\sum_{i=1}^{2L} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i, \gamma^{2L} - \sum_{i=1}^{2L} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i) \end{aligned} \tag{95}$$

which enables us to obtain the following decoded value $\widehat{x}_{L,R_{\beta,\nu_1^L,s}}$:

$$\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}} = s\{(-\gamma)^L/2 - \sum_{i=1}^{L} f_{i,R^i_{\beta,\nu_1^i,s}} (-\gamma)^i\}. \tag{96}$$

---

[5] Personal communication with Prof. Yoshihiko Horio.

Then, its quantisation error $\epsilon_{L,R^L_{\beta,\nu_1^L,s}}(x)$ is bounded as

$$\epsilon_{L,R^L_{\beta,\nu_1^L,s}}(x) = |x - \widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}| \leq \frac{s\gamma^L}{2}, \tag{97}$$

which is the same as in the scale-adjusted β-expansion.

Such a successive approximation of x by the cautious expansion using ν_1^L is described by the contraction process of the interval by the negative β-expansion as follows. Let $I_{i,R^i_{\beta,\nu_1^i,s}}(x) = [l_i^R(\nu_1^i), r_i^R(\nu_1^i))$, $i \geq 1$ be the ith interval for the negative β-expansion map $R_{\beta,\nu_i,s}(x)$ with the threshold sequence $\nu_1^i, (s(\beta-1) \leq \nu_j \leq s)$, recursively defined by

$$\begin{aligned}
l^R_{2\ell+1}(\nu_1^{2\ell+1}) &= l^R_{2\ell}(\nu_1^{2\ell}) - s\gamma^{2\ell+1}(1 - f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}}), \\
r^R_{2\ell+1}(\nu_1^{2\ell+1}) &= r^R_{2\ell}(\nu_1^{2\ell}) - s\gamma^{2\ell}(1 - f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}}\gamma), \\
l^R_{2\ell}(\nu_1^{2\ell}) &= l^R_{2\ell-1}(\nu_1^{2\ell-1}) + s\gamma^{2\ell-1}(1 - f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}\gamma), \\
r^R_{2\ell}(\nu_1^{2\ell}) &= r^R_{2\ell-1}(\nu_1^{2\ell-1}) + s\gamma^{2\ell}(1 - f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}).
\end{aligned} \tag{98}$$

Thus, we have the following lemma.

Lemma 4: *If* $x \in I_{i,R^i_{\beta,\nu_1^i,s}}(x)$, *then* $x \in I_{i+1,R^{i+1}_{\beta,\nu_1^{i+1},s}}(x),\ i \in \mathbb{Z}$.

proof: It is obvious that $x \in I_{0,R_{\beta,\nu,s}}(x) = [0,s)$ because $x \in [0,1) \subset I_{0,R_{\beta,\nu}}(x)$. Suppose that $x \in I_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}(x)$. Then,

$$\begin{aligned}
& x - l^R_{2\ell+1}(\nu_1^{2\ell+1}) \\
&= \gamma^{2\ell} R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) - s\sum_{i=1}^{2\ell} f_{i,R^i_{\beta,\nu_1^i,s}}(-\gamma)^i \\
&- l^R_{2\ell}(\nu_1^{2\ell}) + s\gamma^{2\ell+1}(1 - f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}}) \\
&= \gamma^{2\ell}\{R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) + s\gamma(1 - f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}})\},
\end{aligned}$$

which suggests that if $R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) < \gamma\nu_{2\ell+1},$ *i.e.,* $f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}} = 1$, then $x - l^R_{2\ell+1}(\nu_1^{2\ell+1}) = \gamma^{2\ell}R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) \geq 0$. Otherwise *i.e.,* $f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}} = \beta$, $x - l^R_{2\ell+1}(\nu_1^{2\ell+1}) \geq \gamma^{2\ell+1}\{\nu_{2\ell+1} - s(\beta-1)\} \geq 0$ because $\nu_{2\ell+1} \geq s(\beta-1)$. On the other hand,

$$\begin{aligned}
& r^R_{2\ell+1}(\nu_1^{2\ell+1}) - x \\
&= r^R_{2\ell}(\nu_1^{2\ell}) - s\gamma^{2\ell}(1 - f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}}\gamma) \\
&- \{\gamma^{2\ell}R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) - s\sum_{i=1}^{2\ell} f_{i,R^i_{\beta,\nu_1^i,s}}(-\gamma)^i\} \\
&= s\gamma^{2\ell+1} f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}} - \gamma^{2\ell}R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) \\
&= \gamma^{2\ell}\{s\gamma f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}} - R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x)\},
\end{aligned}$$

which suggests that if $R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x) < \gamma\nu_{2\ell+1}$, *i.e.,* $f_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}} = 1$, then $r^R_{2\ell+1}(\nu_1^{2\ell+1}) - x \geq \gamma^{2\ell+1}(s - \nu_{2\ell+1}) \geq 0$ because $\nu_{2\ell+1} < s$. Otherwise *i.e.,* $f_{2\ell+1,R_{\beta,\nu_1^{2\ell+1},s}} = \beta$, $r^R_{2\ell 1}(\nu_1^{2\ell+1}) - x \geq \gamma^{2\ell}\{s - R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x)\} \geq 0$ because $R^{2\ell}_{\beta,\nu_1^{2\ell},s}(x)) \leq s$. This implies that $x \in I_{2\ell+1,R^{2\ell+1}_{\beta,\nu_1^{2\ell+1},s}}(x)$.

Similarly, suppose that $x \in I_{2\ell-1,R^{2\ell-1}_{\beta,\nu_1^{2\ell-1}}}(x)$. Then,

$$\begin{aligned}
& x - l^R_{2\ell}(\nu_1^{2\ell}) \\
&= -\gamma^{2\ell-1}R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x) - s\sum_{i=1}^{2\ell-1} f_{i,R^i_{\beta,\nu_1^i,s}}(-\gamma)^i \\
&+ s\sum_{i=1}^{2\ell} f_{i,R^i_{\beta,\nu_1^i,s}}(-\gamma)^i \\
&= \gamma^{2\ell-1}\{s\gamma f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}} - R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x)\},
\end{aligned}$$

which suggests that if $R^{2\ell-1}_{\beta,\nu_1^{2\ell-1}}(x) < \gamma\nu_{2\ell}$, *i.e.,* $f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}} = 1$, then $x - l^R_{2\ell}(\nu_1^{2\ell}) = \gamma^{2\ell}(s - \nu_{2\ell}) \geq 0$ because $\nu_{2\ell} \leq s$. Otherwise *i.e.,*$f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}} = \beta$, $x - l^R_{2\ell}(\nu_1^{2\ell}) = \gamma^{2\ell-1}\{s - R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x)\} \geq 0$ because $R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x) \leq s$. On the other hand,

$$\begin{aligned}
& r^R_{2\ell}(\nu_1^{2\ell}) - x \\
&= r^R_{2\ell-1}(\nu_1^{2\ell-1}) + s\gamma^{2\ell}(1 - f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}) \\
&+ \gamma^{2\ell-1}R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x) + s\sum_{i=1}^{2\ell-1} f_{i,R^i_{\beta,\nu_1^i,s}}(-\gamma)^i \\
&= \gamma^{2\ell-1}\{s\gamma(1 - f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}) + R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x)\},
\end{aligned}$$

which implies that if $R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x) < \gamma\nu_{2\ell}$, *i.e.,*$f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}} = 1$, then $r^R_{2\ell}(\nu_1^{2\ell}, s) - x = \gamma^{2\ell-1}R^{2\ell-1}_{\beta,\nu_1^{2\ell-1},s}(x) \geq 0$. Otherwise, *i.e.,*$f_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}} = \beta, r^R_{2\ell}(\nu_1^{2\ell}) - x \geq \gamma^{2\ell}\{-s(\beta-1) + \nu_{2\ell}\} \geq 0$ because $s(\beta-1) \leq \nu_{2\ell}$. This implies that $x \in I_{2\ell,R^{2\ell}_{\beta,\nu_1^{2\ell},s}}(x)$. This completes the proof. □

Similarly, using the idea of Daubechies *et al.* and the negative β-expansion sequences $b_{i,R^i_{\beta,\nu_1^i,s}}$ for x and $c_{i,R^i_{\beta,\nu_1^i,s}}$ for $y = 1 - x$ $(i = 1, 2, \cdots, L)$, we can get the characteristic equation of β in a negative β-encoder as follows:

$$\begin{aligned}
& P_{L,R^L_{\beta,\nu_1^L,s}}(\gamma) \\
&= s\{(-\gamma)^L - \sum_{i=1}^{L}(2 + \{b_{i,R^i_{\beta,\nu_1^i,s}} + c_{i,R^i_{\beta,\nu_1^i,s}}\}(\beta-1))(-\gamma)^i\} - 1 \\
&= s\{[d_{L,R^L_{\beta,\nu_1^L,s}} - 1](-\gamma)^L \\
&- \sum_{i=1}^{L-1}[2 - d_{i,R^i_{\beta,\nu_1^i,s}} + d_{i+1,R^{i+1}_{\beta,\nu_1^{i+1},s}}](-\gamma)^i\} - 1,
\end{aligned} \tag{99}$$

where $d_{i,R^i_{\beta,\nu_1^i,s}} = b_{i,R^i_{\beta,\nu_1^i,s}} + c_{i,R^i_{\beta,\nu_1^i,s}}$. However, it is hard to guarantee the uniqueness of the root of Eq.(99).

The invariant subinterval of the map $R_{\beta,\nu,s}(x)$ consists of 2 line segments as shown in Fig.14. The line segment in the graph of $R_{\beta,\nu,s}(x)$ with the full range is called a *full line* *segment*. [6] There are three possible cases as follows:

1) The right segment is the full line segment (as shown in Fig. 16(a)) whose invariant subinterval is given by

$$[\beta\nu-(\beta^2-\beta)s,\beta s-\nu) \tag{100}$$

when $(\beta-1)s\le\nu<\dfrac{\beta^2-\beta+1}{\beta+1}s$ since

$$\begin{aligned}&\beta s-\nu-\{\beta\nu-(\beta^2-\beta)s\}>\beta s-\nu-\{s-\nu\}\\ \Leftrightarrow\quad &(\beta^2-\beta+1)s-(\beta+1)\nu>0\\ \Leftrightarrow\quad &\nu<\frac{\beta^2-\beta+1}{\beta+1}s.\end{aligned}$$

2) No full line segment (as shown in Fig. 16(b)) whose invariant subinterval is given by

$$[s-\nu,\beta s-\nu), \tag{101}$$

when $\dfrac{\beta^2-\beta+1}{\beta+1}s\le\nu<\dfrac{2\beta-1}{\beta+1}s$ since

$$\begin{aligned}&\beta s-\nu-(s-\nu)=(\beta-1)s>\beta\nu-(\beta-1)s-(s-\nu)\\ \Leftrightarrow\quad &(2\beta-1)s>(\beta+1)\nu.\\ \Leftrightarrow\quad &\nu<\frac{2\beta-1}{\beta+1}s.\end{aligned}$$

3) The left segment is the full line segment (as shown in Fig. 16(c)) whose invariant subinterval is given by

$$[s-\nu,\beta\nu-s(\beta-1)), \tag{102}$$

when $\dfrac{2\beta-1}{\beta+1}s\le\nu\le s$ since

$$\begin{aligned}&\beta\nu-(\beta-1)s-\{s-\nu\}\ge\beta s-\nu-(s-\nu)\\ \Leftrightarrow\quad &(\beta+1)\nu-(2\beta-1)s\ge0\\ \Leftrightarrow\quad &\frac{2\beta-1}{\beta+1}s\le\nu.\end{aligned}$$

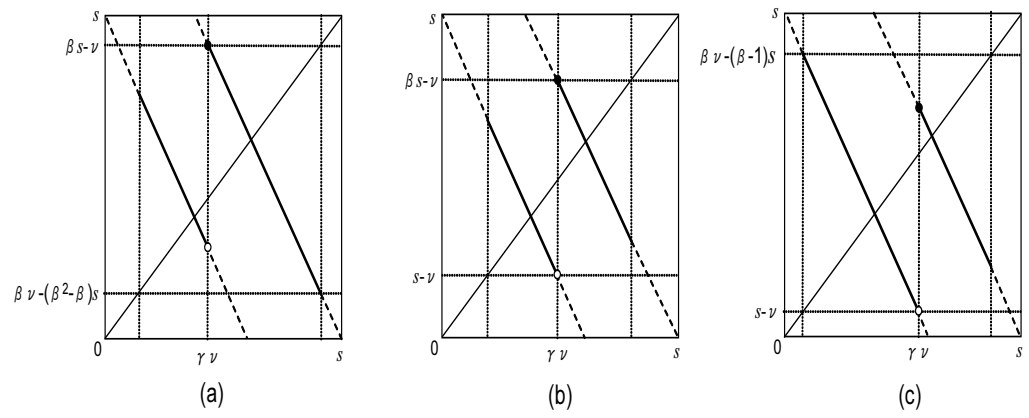

Fig. 16. Negative β-expansion map $R_{\beta,\nu,s}(x)$ with its invariant subinterval when (a) $(\beta-1)s\le\nu<\dfrac{\beta^2-\beta+1}{\beta+1}s$, (b) $\dfrac{\beta^2-\beta+1}{\beta+1}s\le\nu<\dfrac{2\beta-1}{\beta+1}s$, and (c) $\dfrac{2\beta-1}{\beta+1}s\le\nu\le s$.

Since the quantisation error in the β-expansion is bounded as

$$\epsilon_{L,S^L_{\beta,\nu_1^L,s}}(x)=|x-\widehat{x}_{L,S^L_{\beta,\nu_1^L,s}}(x)|=\gamma^L|\frac{s}{2}-S^L_{\beta,\nu_1^L,s}(x)|, \tag{103}$$

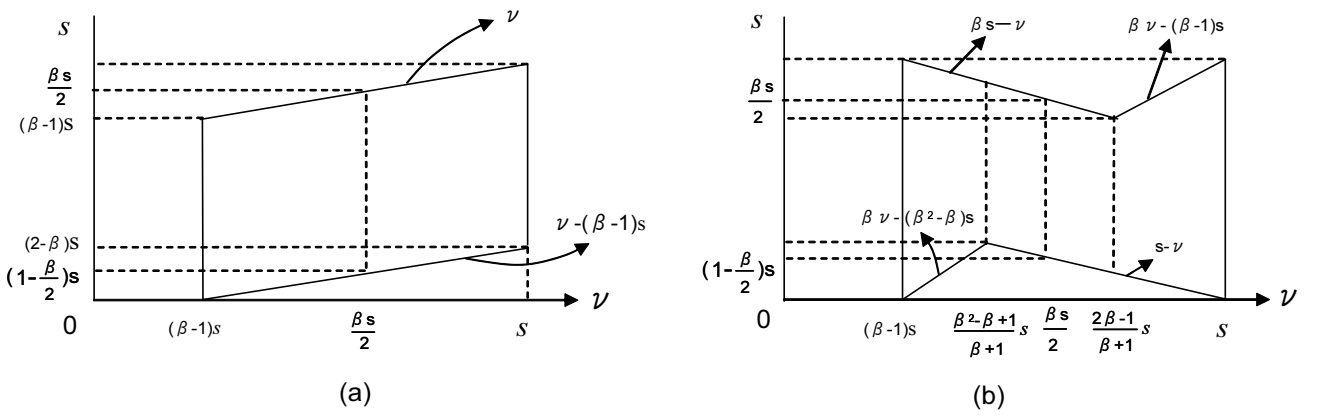

Fig. 17. Invariant subinterval, a function of ν, in (a) an ordinary β-expansion (see Fig.4(a),(b)) and (b) a negative β-expansion (see Fig.16(a),(b),(c)) .

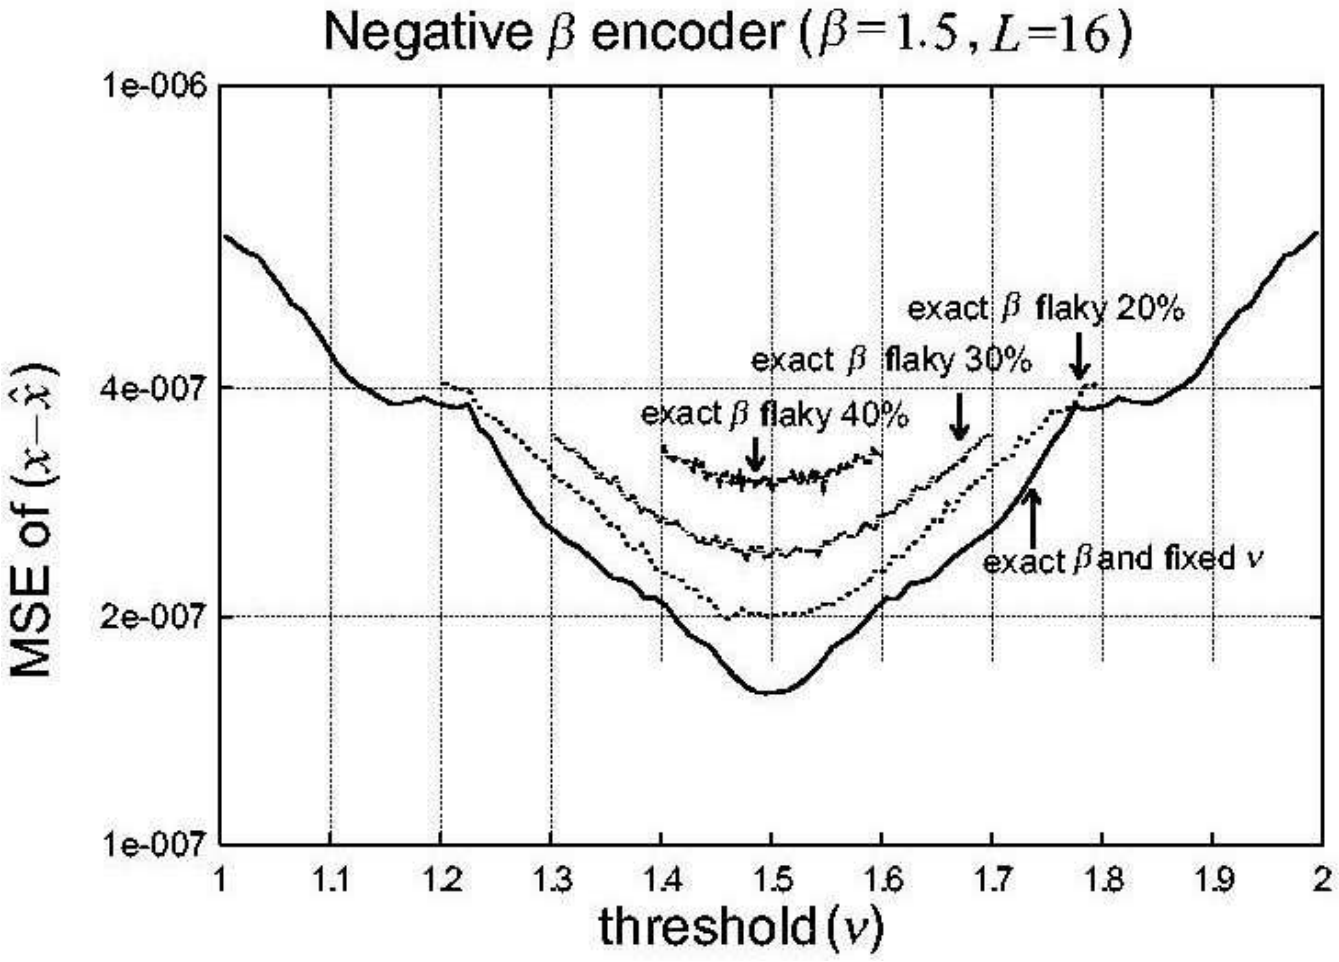

Fig. 18. The MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$) using the exact β of the negative β-encoder with $\beta=1.5$, $L=16$, and $s=(\beta-1)^{-1}$ for fluctuating ν_i, $1\le i\le L$ with its fluctuations $0,20,30,40\%$.

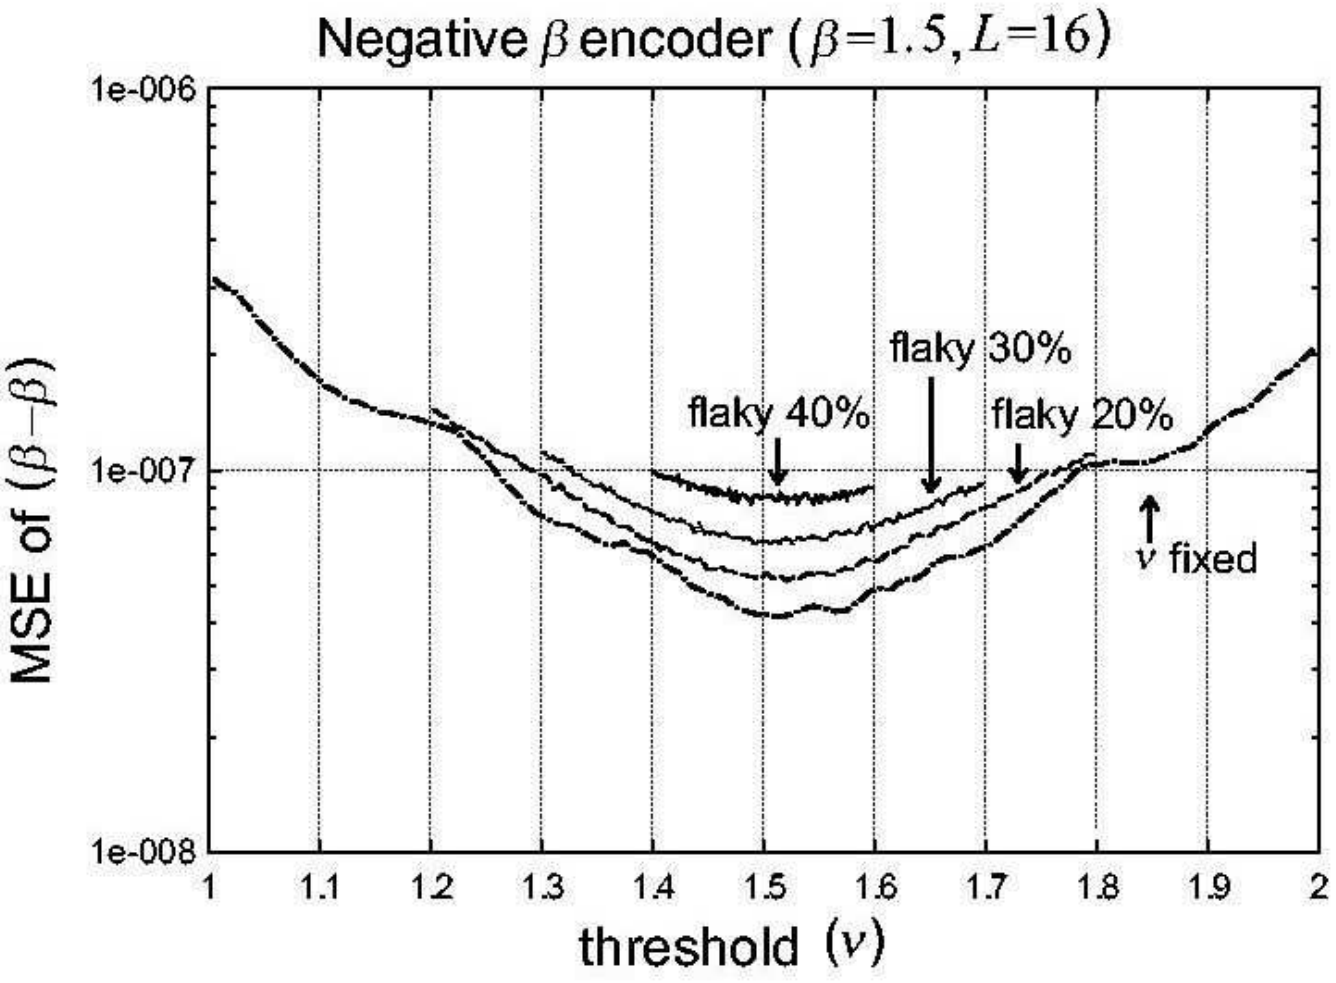

Fig. 19. The MSE of the estimated β, *i.e.*, $\widehat{\beta}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$ of the negative β-encoder with $\beta=1.5$, $L=16$ and $s=(\beta-1)^{-1}$ for fluctuating ν_i, $1\le i\le L$ with its fluctuations $0,20,30,40\%$.

---

[6] In the β-expansion, the greedy-expansion map (or the lazy-expansion map), restricted to its invariant subinterval has a left (or right) full line segment as shown in Fig.4 (a) (or (b)) but the cautious-expansion map, restricted to its invariant subinterval has no full line segment as shown in Fig.3 (a).

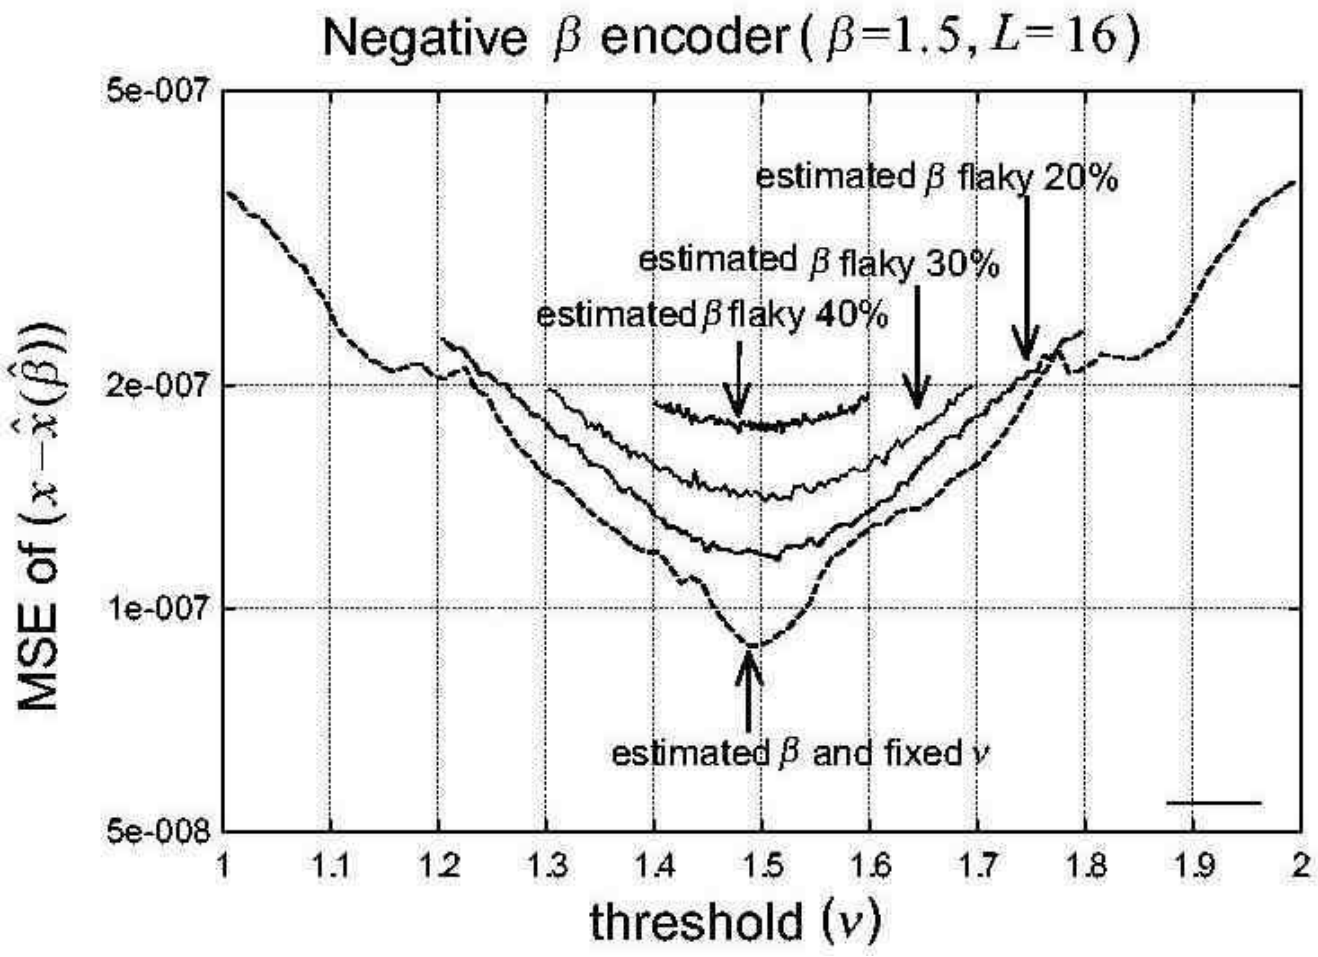

Fig. 20. The MSE($\widehat{x}_{L,R^L_{\beta,\nu^L_1,s}}(\widehat{\gamma},1)$) using the estimated $\widehat{\beta}$ of the negative β-encoder with $\beta = 1.5$, $L = 16$, and $s = (\beta-1)^{-1}$ for fluctuating ν_i, $1 \le i \le L$ with its fluctuations $0, 20, 30, 40\%$.

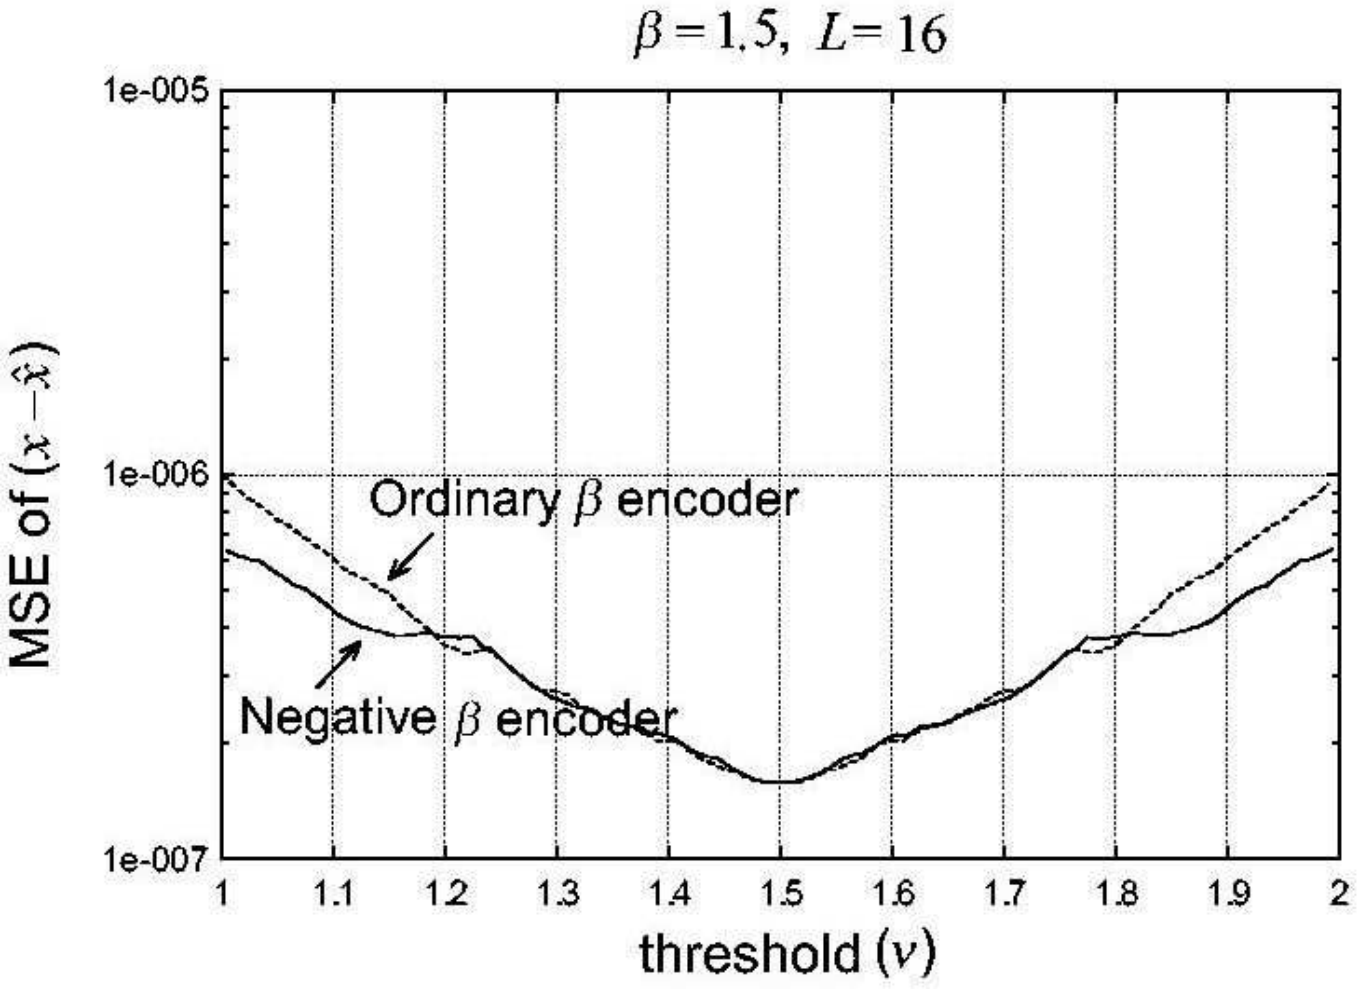

Fig. 21. The MSE($\widehat{x}_{L,C^L_{\beta,\nu^*}}(\gamma,1)$) (or MSE($\widehat{x}_{L,R^L_{\beta,\nu^*,s}}(\gamma,1)$) using the exact β of the β-encoder (or the negative β-encoder) with $\beta = 1.5$, $L = 16$, and $s = (\beta-1)^{-1}$ for fixed $\nu^* \in [1, (\beta-1)^{-1}]$.

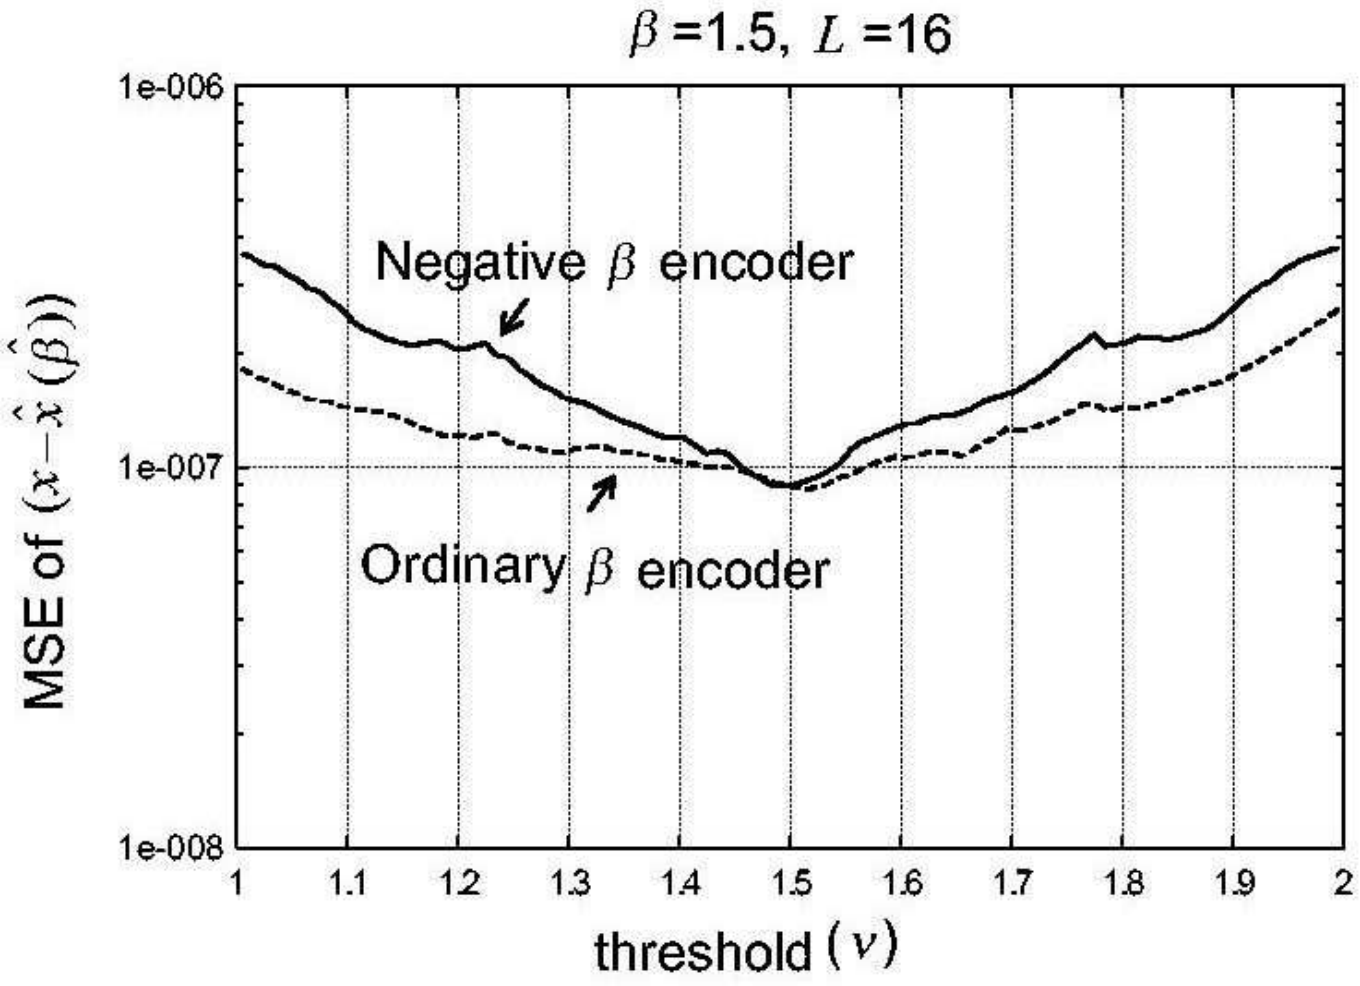

Fig. 22. The MSE($\widehat{x}_{L,C^L_{\beta,\nu^*}}(\widehat{\gamma},1)$) (or MSE($\widehat{x}_{L,R^L_{\beta,\nu^*,s}}(\widehat{\gamma},1)$) using the estimated $\widehat{\beta}$ of the β-encoder (or the negative β-encoder) with $\beta = 1.5$, $L = 16$, and $s = (\beta-1)^{-1}$ for fixed $\nu^* \in [1, (\beta-1)^{-1}]$.

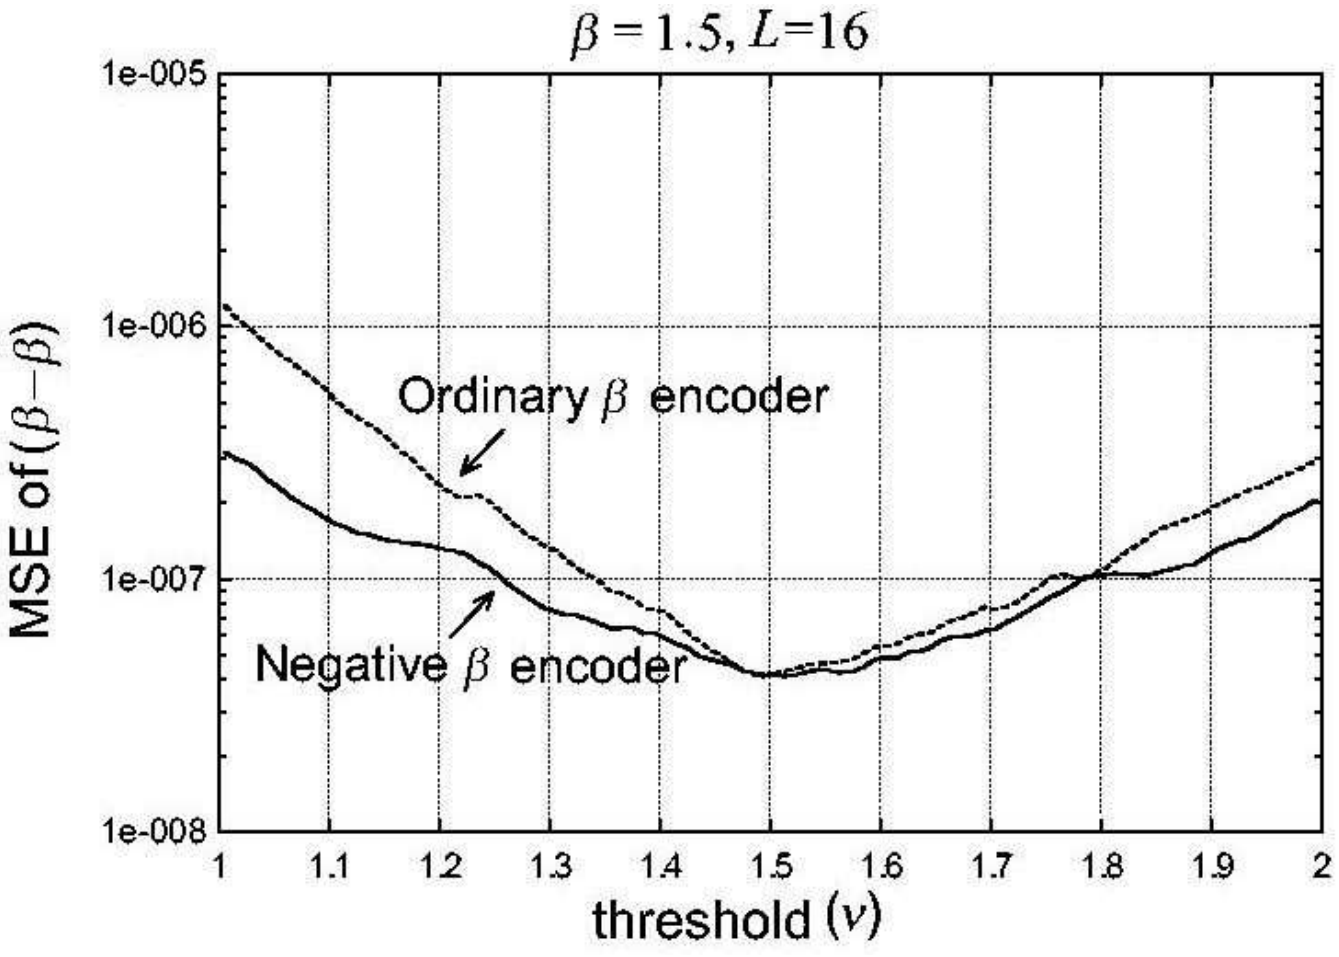

Fig. 23. The MSE of the estimated β, *i.e.*, $\widehat{\beta}_{L,C^L_{\beta,\nu^*}}(\gamma,1)$ (or $\widehat{\beta}_{L,R^L_{\beta,\nu^*}}(\gamma,1)$) of the β-encoder (or the negative β-encoder) with a fixed $\nu^* \in [1, (\beta-1)^{-1}]$ for $\beta = 1.5$, $L = 16$, and $s = (\beta-1)^{-1}$.

the MSE of the quantisation decreases if $S_{\beta,\nu,s}(x)$ frequently takes on values in the middle portion of the interval $[0, s)$. It is natural to assert that the quantisation threshold ν (with the inevitable errors) should be designed to be nearly equal to

$$\nu = \beta s/2 \tag{104}$$

so as to reduce the quantisation MSE (see Figs. 5, 7, 8, 9, 10, 11).

The invariant subinterval in the β-expansion given as $[\nu - s(\beta-1), \nu)$ as a function of ν is illustrated in Figure 17(a), where the β-expansion is here called the *ordinary* β-expansion in order to discriminate between the β-expansion and the negative β-expansion. Hence the MSE becomes lower when $\nu = \dfrac{\beta s}{2}$ since the invariant subinterval is given by $[(1-\dfrac{\beta}{2})s, \dfrac{\beta s}{2})$. Meanwhile, the MSE in the greedy expansion ($\nu = s(\beta-1)$) (or the lazy expansion ($\nu = s$)) increases because the invariant subinterval is given as $[0, (\beta-1)s)$ (or $[s(2-\beta), s)$), which is skewed towards the left (or the right) portion of the initial interval $[0, s)$ as shown in Fig.17(a).

On the other hand, the invariant subinterval in a negative β-expansion as a function of ν is illustrated in Figure 17(b). In particular, both of the greedy expansion and the lazy expansion have as their invariant subintervals, given as $[0, s)$, which is the same as the initial subinterval. Therefore, the quantisation MSE automatically becomes lower compared to that of a β-expansion, while the invariant subinterval in a negative β-expansion with $\nu = \beta s/2$ is given by $[s(1-\beta/2), \beta s/2]$, which is the same as in a β-expansion with $\nu = \dfrac{\beta s}{2}$, so the MSE is comparable. Figures 18 and 19 show the

MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$) using the exact β of the negative β-encoder and the MSE($\widehat{\beta}_{L,R^L_{\beta,\nu_1^L,s}}(\widehat{x},1)$), respectively, with $\beta = 1.5$, $L = 16, s = (\beta-1)^{-1}$ for fluctuating ν_i, $1 \le i \le L$ with their several fluctuation bounds. Figure 20 shows the MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\widehat{\gamma},1)$) using the estimated $\widehat{\beta}$ of the negative β-encoder. Comparing Fig.18 with Fig.20 shows that $\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\widehat{\gamma},1)$ gives a better approximation to x than $\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$. Figure 21 shows the MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\gamma,1)$) (or MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$)) of quantizations using the exact β of the β-encoder (or the negative β-encoder). Figure 22 shows the MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},1)$) (or MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\widehat{\gamma},1)$)) using the estimated $\widehat{\beta}$ of the β-encoder (or the negative β-encoder) with $\beta = 1.5$, $L = 16, s = (\beta-1)^{-1}$ for fixed $\nu^* \in [1,(\beta-1)^{-1}]$. Note that the MSE($\widehat{x}_{L,C^L_{\beta,\nu_1^L}}(\widehat{\gamma},1)$)) is smaller than the MSE($\widehat{x}_{L,R^L_{\beta,\nu_1^L,s}}(\gamma,1)$)) even though the MSE($\widehat{\beta}_{L,R^L_{\beta,\nu_1^L,s}}(\widehat{x},1)$)) is smaller than the MSE($\widehat{\beta}_{L,C^L_{\beta,\nu_1^L}}(\widehat{x},1)$)) as shown in Fig.23.

VIII. MARKOV CHAIN OF BINARY SEQUENCES GENERATED BY β-ENCODER

As discussed above, the *localized* invariant subinterval makes the quantisation MSE in greedy/lazy-expansions worse than that of the cautious-expansion. Regarding a binary sequence generated by the greedy/lazy and cautious expansions as a Markov chain generating binary sequences, we show another clear distinction between them. Furthermore, we observe that such a Markov chain explains the probabilistic behavior of the flaky quantisers, defined by the multivalued Rényi maps.

First, let us notice that there is a close relationship between information sources and a Markov chain with a transition matrix of a finite dimension [35]. The β-expansion maps, however, are not easy to characterize by transition matrices of size 2 except for the original Rényi map with $\beta = (1+\sqrt{5})/2$. [7]

Consider a special class of piecewise-linear Markov maps satisfying conditions 1)-4) of Definition 1, in which in addition, each $\tau|_{I_i}$ is required to be linear on I_i [18]. Such a map simply provides a transition probability matrix. [8] Kalman [31] gave a *deterministic* procedure for embedding a Markov chain into the chaotic dynamics of the piecewise-linear-monotonic onto maps. Several attempts have been made to construct a dynamical system with an arbitrarily precribed Markov information source; in addition, by analogy with chaotic dynamics, arithmetic coding problems are also discussed [32], [33]. The relationship between random number generation and interval algorithms has been discussed in [34]. However, the few attempts or discussions in the following decades remind us that Kalman's embedding procedure, as reviewed in the Appendix, is to be highly appreciated in the sense that Kalman addressed the question of whether irregular sequences observed in physical systems originated from *determinism* or not.

We turn now to the cautious expansion map $C_{\beta,\nu}(x)|_{[\nu-1,\nu)}$, consisting of two line segments $C_{\beta,\nu}(x)|_{[\nu-1,\gamma\nu)}$ and $C_{\beta,\nu}(x)|_{[\gamma\nu,\nu)}$. The inevitable fluctuations of β and ν in an analog AD-conversion, however, prevent the map $C_{\beta,\nu}(x)|_{[\nu-1,\nu)}$ from being a two-state Markov map for the partition $\{[\nu-1,\gamma\nu),[\gamma\nu,\nu)\}$, i.e., the maps $[\nu-1,\gamma\nu) \to [\beta(\nu-1),\nu)$ and $[\gamma\nu,\nu) \to [0,\beta\nu-1)$ do not satisfy the 2-state Markov property (see Fig.3(a)). This situation compels us to introduce an approximated transition matrix of size 2 representing a 2-state Markov chain [28] induced by the map $C_{\beta,\nu}(x)|_{[\nu-1,\nu)}$ as shown in Fig.3(a) as follows.

A detailed observation of Fig.3(a) reveals that $C_{\beta,\nu}(x) < \gamma\nu$, when $x \in [\nu-1,\nu\gamma^2)$ or $x \in [\nu\gamma,\nu\gamma^2+\gamma)$ and $C_{\beta,\nu}(x) \ge \gamma\nu$, when $x \in [\nu\gamma^2,\nu\gamma)$ or $x \in [\nu\gamma^2+\gamma,\nu)$. Hence for $\dfrac{\beta}{\beta^2-1} \le \nu < \dfrac{\beta^2}{\beta^2-1}$, this map $C_{\beta,\nu}(x)$ gives the following conditional probabilities:

$$\begin{aligned}
\Pr[X_{n+1}=0|X_n=0] &= \frac{\nu\gamma^2-(\nu-1)}{\nu\gamma-(\nu-1)} = 1-\frac{U(\nu)}{\beta},\\
\Pr[X_{n+1}=1|X_n=0] &= \frac{\nu\gamma-\nu\gamma^2}{\nu\gamma-(\nu-1)} = \frac{U(\nu)}{\beta},\\
\Pr[X_{n+1}=0|X_n=1] &= \frac{\nu\gamma^2+\gamma-\nu\gamma}{\nu-\nu\gamma} = \frac{1}{\beta U(\nu)},\\
\Pr[X_{n+1}=1|X_n=1] &= \frac{\nu-\nu\gamma^2-\gamma}{\nu-\nu\gamma} = 1-\frac{1}{\beta U(\nu)},
\end{aligned} \tag{105}$$

where $U(\nu) = \dfrac{S(\nu)}{T(\nu)}, S(\nu) = \nu(\beta-1) > 0$, and $T(\nu) = \nu-\beta(\nu-1) > 0$. These propabilities define the transition matrix as follows:

$$\begin{aligned}
&P(\beta,\nu)\\
&= \begin{cases}
\begin{pmatrix} 1-\dfrac{U(\nu)}{\beta} & \dfrac{U(\nu)}{\beta} \\ 1 & 0 \end{pmatrix}, \text{ for } \nu < \frac{\beta}{\beta^2-1},\\
\begin{pmatrix} 1-\dfrac{U(\nu)}{\beta} & \dfrac{U(\nu)}{\beta} \\ \dfrac{1}{\beta U(\nu)} & 1-\dfrac{1}{\beta U(\nu)} \end{pmatrix}, \text{ for } \frac{\beta}{\beta^2-1} \le \nu \le \frac{\beta^2}{\beta^2-1},\\
\begin{pmatrix} 0 & 1 \\ \dfrac{1}{\beta U(\nu)} & 1-\dfrac{1}{\beta U(\nu)} \end{pmatrix}, \text{ for } \nu > \frac{\beta^2}{\beta^2-1},
\end{cases}
\end{aligned} \tag{106}$$

whose stationary distribution is defined as

$$\begin{aligned}
&(\Pr[X=0],\, \Pr[X=1]) = (m_\infty, 1-m_\infty)\\
&= \begin{cases}
\dfrac{1}{S(\nu)+\beta T(\nu)}\,(\beta T(\nu),\, S(\nu)) & \text{for } \nu < \dfrac{\beta}{\beta^2-1},\\
\dfrac{1}{S(\nu)^2+T(\nu)^2}\,\big(T^2(\nu),\, S^2(\nu)\big) & \text{for } \dfrac{\beta}{\beta^2-1} \le \nu < \dfrac{\beta^2}{\beta^2-1},\\
\dfrac{1}{T(\nu)+\beta S(\nu)}\,(T(\nu),\, \beta S(\nu)) & \text{for } \nu > \dfrac{\beta^2}{\beta^2-1},
\end{cases}
\end{aligned} \tag{107}$$

---

[7] This value is a root of $\gamma = \beta - 1$, which comes from the sufficient condition for the greedy map to be a two-state Markov map for the partition $\{[0,\gamma),[\gamma,1)\}$, i.e., the maps $[0,\gamma) \to [0,1)$ and $[\gamma,1) \to [0,\beta-1)$ satisfy the two-state Markov property (condition 3)) of Definition 1.

[8] Ulam [29] posed the problem of the existence of an absolutely continuous invariant measure for the map, known as the *Ulam's conjecture,* and defined the transition probability matrix. See the Appendix for detail.

and whose second eigenvalue $\lambda(\beta,\nu)$, besides 1, is given as

$$\lambda(\beta,\nu)=\begin{cases} -\dfrac{U(\nu)}{\beta}, & \text{for } \nu < \dfrac{\beta}{\beta^2-1}, \\ 1-\dfrac{1}{\beta}\left(U(\nu)+U^{-1}(\nu)\right), & \text{for } \dfrac{\beta}{\beta^2-1} \le \nu < \dfrac{\beta^2}{\beta^2-1}, \\ -\dfrac{1}{\beta U(\nu)}, & \text{for } \nu > \dfrac{\beta^2}{\beta^2-1}. \end{cases} \tag{108}$$

The second eigenvalue is bounded as $\lambda(\beta,\nu) \le 1-\dfrac{2}{\beta} \le 0$ if $\dfrac{\beta}{\beta^2-1} \le \nu < \dfrac{\beta^2}{\beta^2-1}$ (or $\lambda(\beta,\nu)<0$ otherwise). For the greedy case ($\nu = 1$), we have $\lambda(\beta,1) = 1-\beta^{-1}(\beta-1+(\beta-1)^{-1})$ and $(\Pr[X=0], \Pr[X=1]) = \frac{1}{(\beta-1)^2+1}\left(1,(\beta-1)^2\right)$; while for the lazy case ($\nu = (\beta-1)^{-1}$), we have $\lambda(\beta,(\beta-1)^{-1}) = \lambda(\beta,1)$ and $(\Pr[X=0], \Pr[X=1]) = (1+\beta^2)^{-1}\left(\beta^2, 1\right)$. The second eigenvalues $\lambda(\beta,\nu)$ illustrated in Fig.24 show that for almost all β and ν, $P(\beta,\nu)$ has a negative eigenvalue of large magnitude except in the cases with $\beta = 1$ and $\beta = 2$. To confirm this fact, we introduce another method for estimating the non-unit eigenvalues of a two-state Markov chain as follows.

Let $b_1, b_2, \cdots, b_N$ be a binary sequence generated by the β-encoder. We regard $\{b_i\}$ as a two-state Markov chain with transition matrix $P(\{n_{ij}\})$ [28], defined as

$$P(\{n_{ij}\}) = \begin{pmatrix} \frac{n_{00}}{n_{00}+n_{01}} & \frac{n_{01}}{n_{00}+n_{01}} \\ \frac{n_{10}}{n_{10}+n_{11}} & \frac{n_{11}}{n_{10}+n_{11}} \end{pmatrix}, \tag{109}$$

where n_{00}, n_{01}, n_{10} and n_{11} are frequencies defined as

$$\begin{array}{ll} n_{00} = \sum_{i=1}^{N-1} \overline{b_i}\cdot\overline{b_{i+1}}, & n_{01} = \sum_{i=1}^{N-1} \overline{b_i}\cdot b_{i+1}, \\ n_{10} = \sum_{i=1}^{N-1} b_i\cdot\overline{b_{i+1}}, & n_{11} = \sum_{i=1}^{N-1} b_i\cdot b_{i+1}. \end{array} \tag{110}$$

Such a matrix $P(\{n_{ij}\})$ enables us to estimate the second eigenvalue $\tilde{\lambda}$ provided that N is a sufficiently large number e.g. $N = 100,000$. The results illustrated in Fig.25 show that almost all the eigenvalues are negative and that the value $\tilde{\lambda}$ of the greedy (or the lazy) scheme is larger than that of the cautious scheme for almost all β and ν. The negative non-unit eigenvalue of the transition probability matrix of size 2, $P(\beta,\nu)$ plays an important role in designing spreading spectrum codes generated by a Markov chain with its negative eigenvalue in an asynchronous direct spread code multiple accesss system to improve the bit error performance [36], [37], [38]. [9]

IX. CONCLUSION

The β-expansion has been shown to be characterized by the process of contraction of the subinterval containing a sample x. This has led to the following three results: (1) the new characteristic equation of the amplification factor β provides decoded values of β and a sample x with high precisions; (2) the negative β-encoder improves the quantisation MSE in greedy/lazy schemes; (3) if a binary sequence generated by the β-encoder is regarded as a two-state Markov chain, then the second eigenvalue of the Markov transition matrix is negative, and the absolute value of the eigenvalue is larger in the cautious scheme than in the greedy/lazy schmes, which is relevant to the precision of the decoded values of both β and x. However, it remains unknown why the value of x decoded using the estimated value $\widehat{\beta}$ gives a better approximation to x than that using the exact value β. In addition, the relationship between the quantisation MSE and binary sequences, approximated by Markov chains with the transition matrix having its negative eigenvalue has been omitted here because the MSE as a function of β and ν is complicated even for the transition probability matrix of size 2, $P(\beta,\nu)$. In general, β-expansions need more sophisticated discussion using a Markov chain with a transition probability matrix of size more than 2, which is an important problem for future research.

APPENDIX
KALMAN'S PROCEDURE OF EMBEDDING A MARKOV CHAIN INTO A NONLINEAR MAP

Given a set of states $S = \{1, 2, \cdots, N_s\}$ and a probability transition matrix $P = \{p_{ij}\}_{i,j=1}^{N_s}$, satisfying $p_{ij} \ge 0$ for all i, j; $\sum_{j=1}^{N_s} p_{ij} = 1$ for all i, we define a sequence of random variables $Z_0, Z_1, \ldots$ taking values in S. If Z_0 has an arbitrary distribution

$$\Pr\{Z_{n+1} = s_k | Z_0 = s_{i_0}, \cdots, Z_n = s_{i_n}\} = p_{i_n,k}, \tag{111}$$

then the sequence of random variables $Z_0, Z_1, \ldots$ is called an N_s-state Markov chain. Given a Markov chain $Z_0, Z_1, \ldots$ and a function f whose domain is S and whose range is an alphabet set $\Gamma = \{\gamma_1, \cdots, \gamma_{N_a}\}$, and assuming that the initial state Z_0 is chosen in accordance with a stationary distribution $\mathbf{u} = (u_1, \cdots, u_{N_s})$, then the stationary sequence $X_n = f(Z_n)$, $n = 0, 1, 2, \ldots$ is said to be the Markov information source. In this paper, for simplicity, we take $\Gamma = S$, $N_a = N_s$, and f to be the identity function.

Kalman gave a simple procedure for embedding a Markov chain with transition matrix $P = \{p_{ij}\}_{i,j=1}^{N_s}$, satisfying

$$0 < p_{ij} < 1 \quad \text{for all } i, j \tag{112}$$

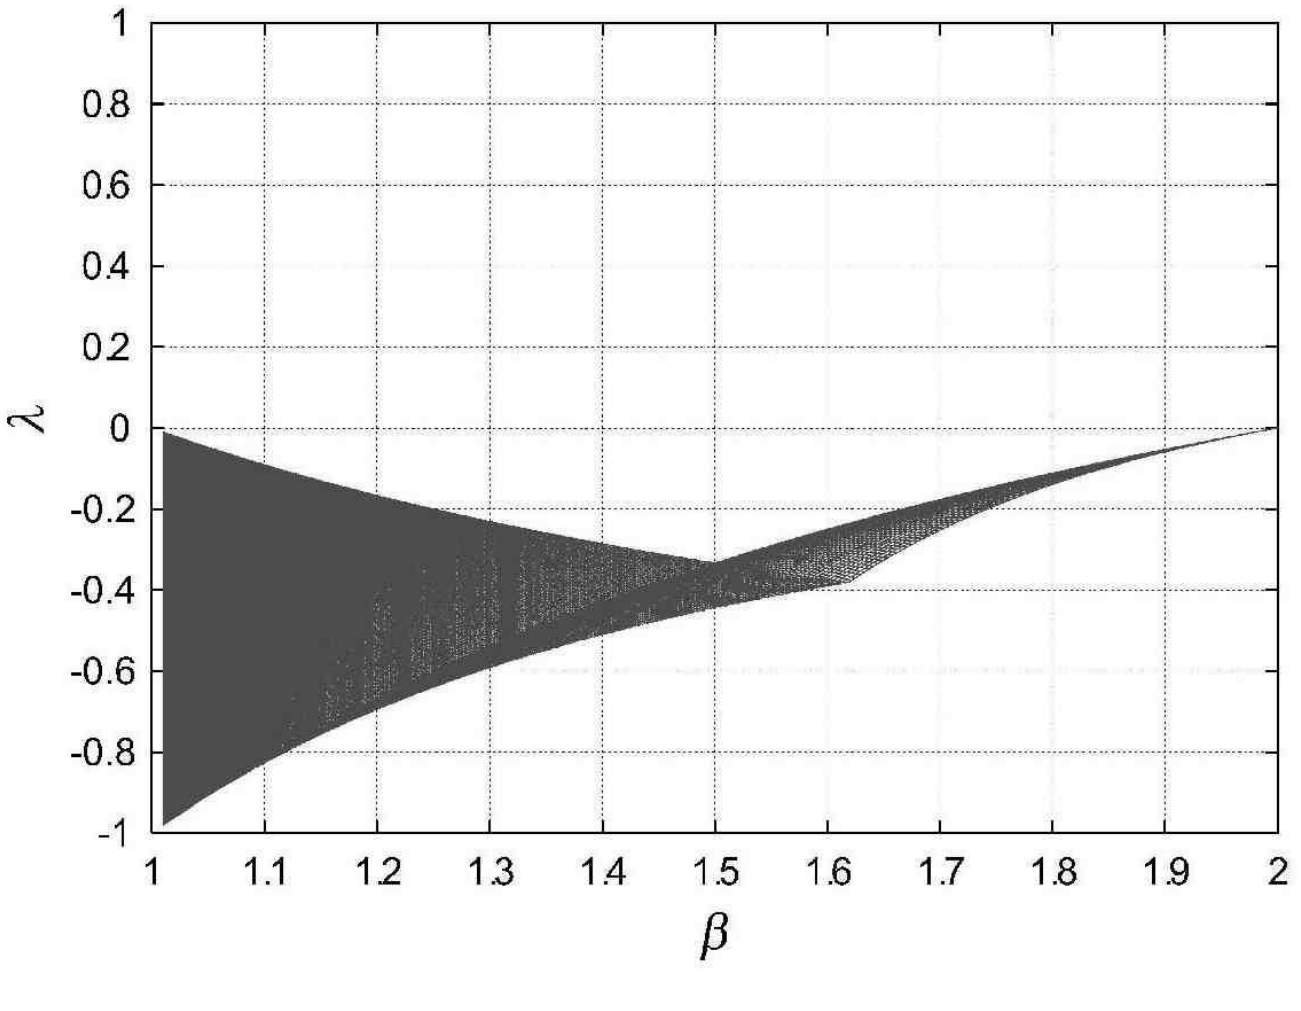

Fig. 24. The second eigenvalue of the approximated transition probability matrix $P(\beta,\nu)$ as a function of β and ν.

---

[9] The reader interested in chaos-based spread-spectrum communication should see the review paper [35]

into an onto Piecewise-Linear Map (PLM) map $\tau : J = [0, 1] \to J$ with N_s^2 subintervals, defined by

$$\omega_{n+1} = \tau(\omega_n), \quad n = 0, 1, 2, \ldots, \quad \omega_n \in J \tag{113}$$

as follows. [10]

First divide the interval J into N_s subintervals such that $J = \bigcup_{i=1}^{N_s} J_i$, where

$$J_i = (d_{i-1}, d_i], \quad d_0 = 0 < d_1 < d_2 < \cdots < d_{N_s} = 1. \tag{114}$$

Furthermore, divide the subintervals J_i $(1 \leq i \leq N_s)$ into N_s subintervals such that $J_i = \bigcup_{j=1}^{N_s} J_{i,j}$, where

$$J_{i,j} = \begin{cases} (d_{i,j-1}, d_{i,j}] & \text{for } \tau(d_i) = 1, \\ \quad (d_{i,0} = d_{i-1},\ d_{i,N_s} = d_i), & \\ (d_{i,j}, d_{i,j-1}] & \text{for } \tau(d_i) = 0, \\ \quad (d_{i,0} = d_i,\ d_{i,N_s} = d_{i-1}), & \end{cases} \tag{115}$$

subject to the conditions of a Markov partition,

$$\begin{aligned} \tau(d_i) &\in \{0, 1\}, \quad \text{for } 1 \leq i \leq N_s, & (116) \\ \tau(d_{i,j}) &= d_j, \quad \text{for } 1 \leq i, j \leq N_s, & (117) \end{aligned}$$

and the condition of the transition probabilities

$$\frac{|J_{i,j}|}{|J_i|} = p_{ij}, \quad \text{for } 1 \leq i, j \leq N_s. \tag{118}$$

Thus, the restrictions of Kalman's maps τ to the interval $J_{i,j}$, denoted by $\tau_{i,j}(\omega)$, are of the form

$$\tau_{i,j}(\omega) = \begin{cases} \dfrac{|J_i|\omega + (d_{i,j}d_{j-1} - d_{i,j-1}d_j)}{|J_{i,j}|}, \\ \qquad \omega \in J_{i,j} \quad \text{for } \tau(d_i) = 1, \\ \dfrac{-|J_i|\omega + (d_{i,j-1}d_j - d_{i,j}d_{j-1})}{|J_{i,j}|}, \\ \qquad \omega \in J_{i,j} \quad \text{for } \tau(d_i) = 0. \end{cases} \tag{119}$$

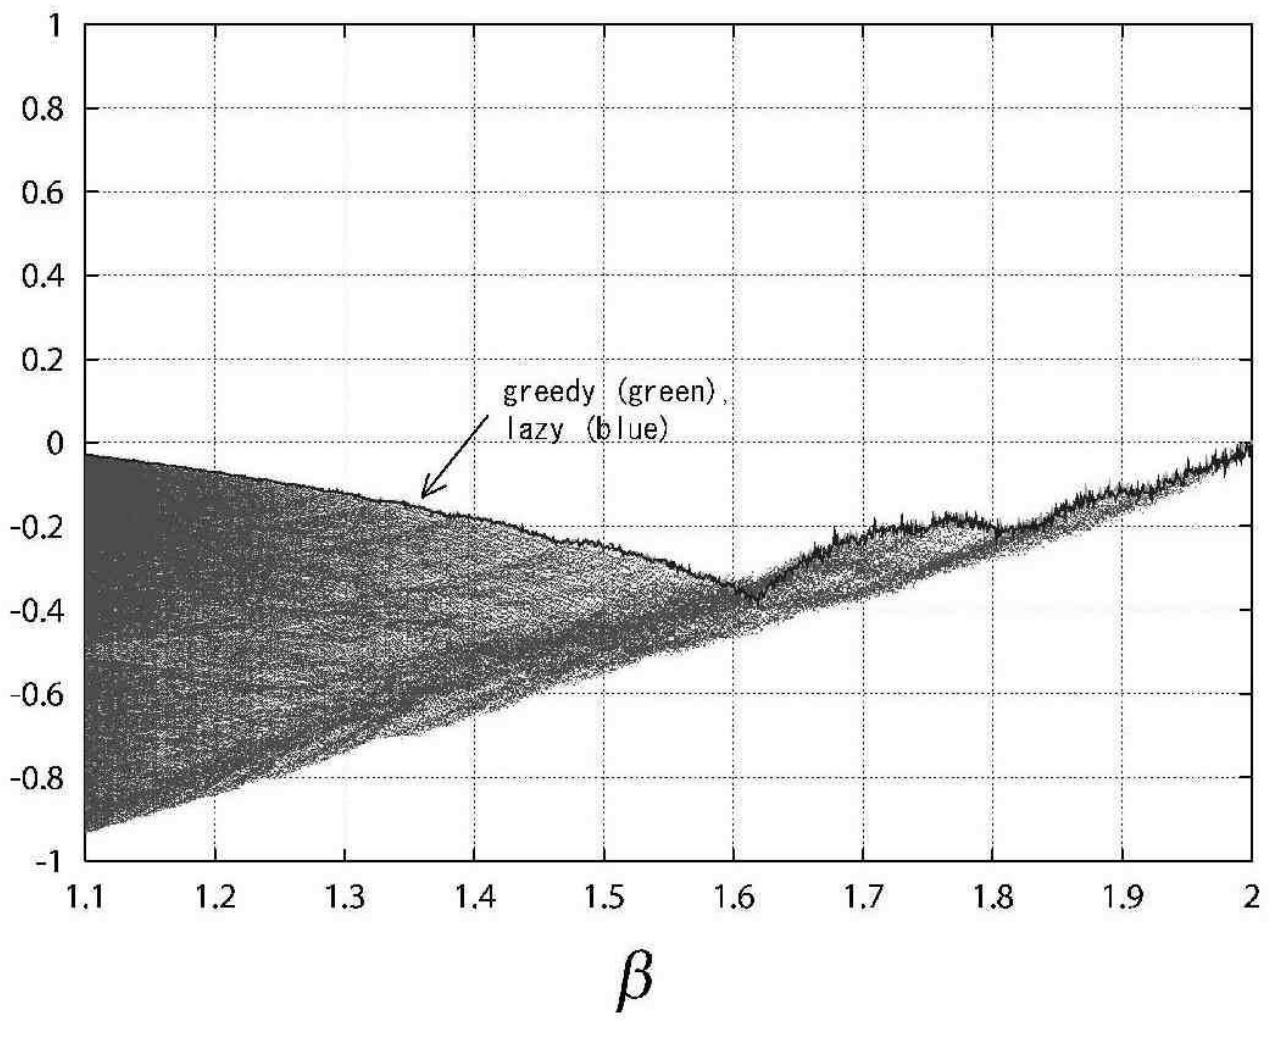

Fig. 25. The distribution of the second eigenvalue of the approximated transition probability $P(\{n_{ij}\})$ as a function of β and ν, for $N = 100,000$ and $x = \nu - \pi/10$.

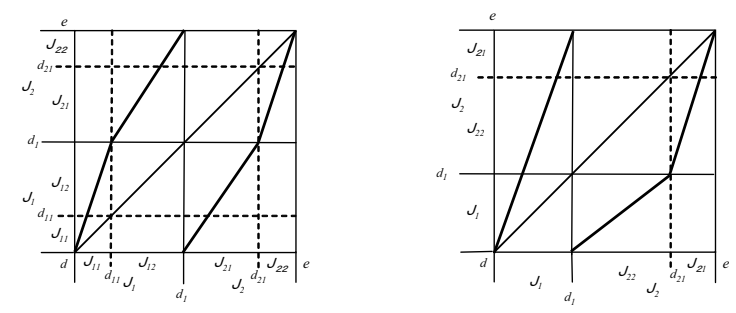

(a) (b)

Fig. 26. An example of Kalman maps with (a) 4 and (b) 3 subintervals.

For simplicity, consider the case where $N_s = 2$ and define the $N_s^2 \times N_s^2$ matrix

$$\widehat{P} = \begin{bmatrix} p_{11} & p_{12} & 0 & 0 \\ 0 & 0 & p_{21} & p_{22} \\ p_{11} & p_{12} & 0 & 0 \\ 0 & 0 & p_{21} & p_{22} \end{bmatrix}. \tag{120}$$

Let $\Lambda(\widehat{P})$ be the set of all eigenvalues of $\widehat{P}$. Then we get

$$\Lambda(\widehat{P}) = \Lambda(P) \cup 0^{N_s^2 - N_s}, \tag{121}$$

where P is an $N_s \times N_s$ matrix with $N_s = 2$, defined by

$$P = \begin{bmatrix} p_{11} & p_{12} \\ p_{21} & p_{22} \end{bmatrix}. \tag{122}$$

Equation (121) implies that a Markov chain is embedded into the chaotic map $\tau(\omega) = \{\tau_{i,j}(\omega)\}_{i,j=1}^{N_s}$. Figures 26(a) and (b) show an example of the Kalman map with 4 subintervals and a revised one with 3 subintervals, respectively.

ACKNOWLEDGMENT

The authors would like to acknowledge the valuable and insightful comments and suggestions of the anonymous reviewers which improved the quality of the paper. The authors would like to thank Prof. Yutaka Jitsumatsu for help in generating the simulations and figures.

REFERENCES

[1] C. Güntürk, J.C.Lagarias, and V.A.Vaishampayan, "On the robustness of single-loop sigma-delta modulation," *IEEE Transactions on Information Theory*, **47**-5 pp.1734-1744, 2001.
[2] C. Güntürk, "One-bit sigma-delta quantization with exponential accuracy," *Commun. Pure Applied Math.*, **56**-11 pp.1608-1630, 2003.
[3] Cvetkovic, Z., Daubechies, I. and Logan, BF, "Single-Bit Oversampled A/D Conversion With Exponential Accuracy in the Bit Rate", *IEEE Transactions on Information Theory*, **53**-11, 3979-3989, 2007.
[4] Inose, H., and Yasuda, Y., "A unity bit coding method by negative feedback," *Proceedings of the IEEE*, **51**-11, pp.1524 - 1535, Nov. 1963.
[5] J. Candy "A use of limit cycle oscillations to obtain robust analog-to-digital converters," Communications, *IEEE Transactions on [legacy, pre - 1988]* , **22**-3, pp.298-305, Mar. 1974.
[6] A.R. Calderbank, and I. Daubechies, "The pros and cons of democracy," *IEEE Transactions on Information Theory*, **48**-6, pp.1721-1725, Jun. 2002. **53**-11, pp.3979-3989, 2007.
[7] Stephen H. Lewis, and Paul R. Gray, "A pipelined 5-Msample/s 9-bit analog-to-digital converter," *IEEE Journal of Solid-State Circuits*, **22**-6, pp.954-961, Dec 1987.
[8] N.S.Jayant and Peters Noll, "*Digital communications of waveforms – principles and applications to speech and video*", Prentice-Hall, Englewood Cliifs, NJ,1984.
[9] Robert M. Gray , "Oversampled sigma-delta modulation," *Communications, IEEE Transactions on [legacy, pre - 1988]*, **35**-5, pp.481-489, May 1987.
[10] Robert M. Gray "Spectral analysis of quantization noise in a single-loop sigma-delta modulator with dc input," *IEEE Transcations on Communications*, **37**-6, pp.588-599, Jun. 1989.

---

[10] Readers interested in Ulam's conjecture, and Kalman's procedure as well as its revised version should see [35].

[11] I. Daubechies, and R. DeVore "Approximating a bandlimited function from very coarsely quantized data: A family of stable sigma-delta modulators of arbitray order," *Annals of mathematics*, **158**-2, pp.679-710, Sep. 2003.

[12] I. Daubechies, R. DeVore, C. Güntürk, and V. Vaishampayan, "Beta expansions: a new approach to digitally corrected A/D conversion," *IEEE International Symposium on Circuits and Systems, 2002. ISCAS 2002*, **2**, pp.784-787, May. 2002.

[13] I. Daubechies, R. DeVore, C. Güntürk, and V. Vaishampayan, "A/D conversion with imperfect quantizers," *IEEE Transcations on Information Theory*, **52**-3, pp.874-885, Mar. 2006.

[14] K. Dajani, and C. Kraaikamp, "From greedy to lazy expansions and their driving dynamics," *Expo. Math*, 2002.

[15] I. Daubechies, and Ö. Yilmaz, "Robust and practical analog-to-digital conversion with exponential precision," *IEEE Transactions on Information Theory*, **52**-8, pp.3533-3545, Aug. 2006.

[16] P.Billingsley,"*Probability and Measure*," New York:Wiley,1995.

[17] A.Lasota and M.C.Mackey, "*Chaos, Fractals, and Noise*", New York:Springer-Verlag, 1994.

[18] A. Boyarsky and P.Góra, "*Laws of Chaos:Invariant Measures and Dynamical Systems in One Dimension*", Birkhäuser, Boston, 1997.

[19] Karen.M.Brucks and Henk.Bruin, "*Topics from one-dimensinal dynamics*", London Mathematical Society Student Texts **62**, Cambridge University Press, United Kingdom, 2004.

[20] A. Rényi, "Representations for real numbers and their ergodic properties," *Acta Mathematica Hungarica*, **8**, no.3-4, pp.477-493, Sep. 1957.

[21] R.Adler and L.Flatto, "Geodesic flows, interval maps, and symbolic dynamics," *Bulltein of the American Mathematical Society*, **25**-2, pp.229–334, 1991.

[22] A.O.Gelfond,"On a general property of number systems(Russian)), *Izy.Akad.Nauk.SSSR.*, **23**, pp.809–814, 1959.

[23] W. Parry, "On the β-expansions of real numbers," *Acta Math. Acad. Sci. Hung.*, **11**, pp.401–416, 1960.

[24] W. Parry, "Representations for real numbers," *Acta Math.Acad. Sci.Hung.*, **15**, pp.95–105,1964.

[25] P. Erdös, and I. Joó, "On the expansion $1 = \sum_{i=1}^{\infty} q^{-n_i}$," *Periodica Mathematica Hungarica*, **23**-1, pp.25-28, Aug. 1991.

[26] P. Erdös, I. Joó and V. Komornik, "Characterization of the unique expansions $1 = \sum_{i=1}^{\infty} q^{-n_i}$ and related problems", *Bull. Soc. Math. France*, **118**, pp.377-390, 1990.

[27] K. Dajani, and C. Kraaikamp, "*Ergodic Theory of Numbers*," The Carus Mathematical Monograph No.29, Published by The Mathematical Association of America, 2002.

[28] Hironaka, S., Kohda, T. and Aihara, K., "Markov chain of binary sequences generated by A/D conversion using β-encoder", *Proc. of 15th IEEE International Workshop on Nonlinear Dynamics of Electronic Systems*, pp.261-264, 2007.

[29] S.M.Ulam,"*A collection of mathematical problems*", New York: Interscience, 1960.

[30] Ulam,S.M. and von Neumann,J:"On combinations of stochastic and deterministic processes," *Bull.Am. Math. Soc.*, **53**,p. 1120, 1947.

[31] R.E.Kalman,"Nonlinear aspects of sampled-data control systems," in *Proc. Symp. Nonlinear Circuit Analysis VI*, pp.273-313,1956.

[32] M.F.Barnsley, "*Fractal Image Compression*, Natick,MA:AKPeters, 1993.

[33] F.Kanaya, "A chaos model of finite-order Markov sources and arithmetic coding," *1997 IEEE Int. Symp. Information Theory*, p.247,1997.

[34] Te Sun Han and Hoshi, M. , "Interval algorithm for Random number Generation," *IEEE Transaction on Information Theory*, **43**-2, pp.599–611, 1997.

[35] Kohda, T., "Information sources using chaotic dynamics," *Proceeding of the IEEE*, **90**-5, pp.641-661, May. 2002.

[36] G. Mazzini, G. Setti, and R. Rovatti, "Chaotic complex spreading sequences for asynchronous DS-CDMA -part I: System modeling and results," *IEEE Trans. Circuits Syst.* I, vol. 44, no. 10, pp. 937-947, 1997.

[37] G. Mazzini, R.Rovatti, and G. Setti, "Interference minimisation by autocorrelation shaping in asynchronous DS/CDMA systems: Chaos based spreading is nearly optimal," *Electronics Letters, IEE*, **35**, pp. 1054-55, 1999.

[38] Kohda, T., and Fujisaki, H., "Variances of multiple access interference code average against data average," *Electronics Letters*, **36**-20, pp.1717-1719, Sep. 2000.